



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL360 Gen10


(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

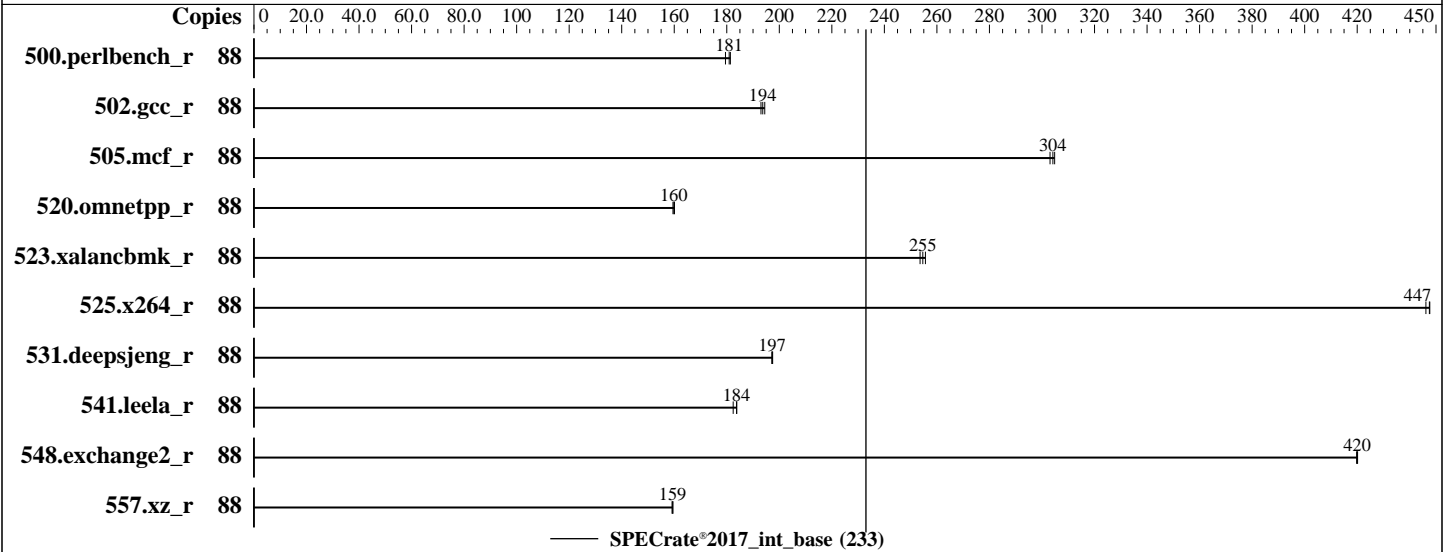

### Hardware

CPU Name: Intel Xeon Gold 6238T  
Max MHz: 3700  
Nominal: 1900  
Enabled: 44 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 30.25 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 400 GB SAS SSD, RAID 0  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
Kernel 4.12.14-23-default  
Compiler: C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux;  
Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux  
Parallel: No  
Firmware: HPE BIOS Version U32 05/21/2019 released Jun-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jul-2019  
Hardware Availability: Jun-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	88	<b>774</b>	<b>181</b>	780	180	772	181							
502.gcc_r	88	<b>643</b>	<b>194</b>	641	194	646	193							
505.mcf_r	88	469	303	467	305	<b>468</b>	<b>304</b>							
520.omnetpp_r	88	724	160	721	160	<b>722</b>	<b>160</b>							
523.xalancbmk_r	88	<b>365</b>	<b>255</b>	364	256	366	254							
525.x264_r	88	<b>344</b>	<b>447</b>	345	446	344	448							
531.deepsjeng_r	88	511	197	<b>511</b>	<b>197</b>	512	197							
541.leela_r	88	793	184	799	182	<b>793</b>	<b>184</b>							
548.exchange2_r	88	<b>549</b>	<b>420</b>	549	420	549	420							
557.xz_r	88	<b>596</b>	<b>159</b>	597	159	596	160							

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017\_u2/lib/ia32:/home/cpu2017\_u2/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Enhanced Processor Performance set to Enabled  
Workload Profile set to General Throughput Compute  
Workload Profile set to Custom  
Energy/Performance Bias set to Balanced Performance  
Sysinfo program /home/cpu2017\_u2/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-nub3 Wed Jul 10 10:55:02 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6238T CPU @ 1.90GHz
 2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 1: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 88
On-line CPU(s) list: 0-87
Thread(s) per core: 2
Core(s) per socket: 22
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6238T CPU @ 1.90GHz
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

## Platform Notes (Continued)

```
Stepping: 6
CPU MHz: 1900.000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-10,44-54
NUMA node1 CPU(s): 11-21,55-65
NUMA node2 CPU(s): 22-32,66-76
NUMA node3 CPU(s): 33-43,77-87
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd
```

```
/proc/cpuinfo cache data
cache size : 30976 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 44 45 46 47 48 49 50 51 52 53 54
node 0 size: 96321 MB
node 0 free: 96057 MB
node 1 cpus: 11 12 13 14 15 16 17 18 19 20 21 55 56 57 58 59 60 61 62 63 64 65
node 1 size: 96763 MB
node 1 free: 96429 MB
node 2 cpus: 22 23 24 25 26 27 28 29 30 31 32 66 67 68 69 70 71 72 73 74 75 76
node 2 size: 96763 MB
node 2 free: 96616 MB
node 3 cpus: 33 34 35 36 37 38 39 40 41 42 43 77 78 79 80 81 82 83 84 85 86 87
node 3 size: 96762 MB
node 3 free: 96616 MB
node distances:
node 0 1 2 3
0: 10 21 31 31
1: 21 10 31 31
2: 31 31 10 21
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

## Platform Notes (Continued)

3: 31 31 21 10

From /proc/meminfo

MemTotal: 395889644 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-nub3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Jul 10 10:53

SPEC is set to: /home/cpu2017\_u2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda1 xfs 373G 135G 238G 37% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U32 05/21/2019

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2933

(End of data from sysinfo program)

The marketing name for the processor in this result, which appears in the CPU name and hardware model areas, is different from sysinfo because a pre-production processor was used. The pre-production processor differs from the production processor in name only.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10**

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

## Compiler Version Notes

```
=====  
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
          | 525.x264_r(base) 557.xz_r(base)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
          | 541.leela_r(base)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran   | 548.exchange2_r(base)  
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(1.90 GHz, Intel Xeon Gold 6238T)

SPECrate®2017\_int\_base = 233

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jul-2019  
**Hardware Availability:** Jun-2019  
**Software Availability:** Feb-2019

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-03.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-03.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-10 01:25:01-0400.

Report generated on 2019-11-05 10:45:12 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-04.