



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

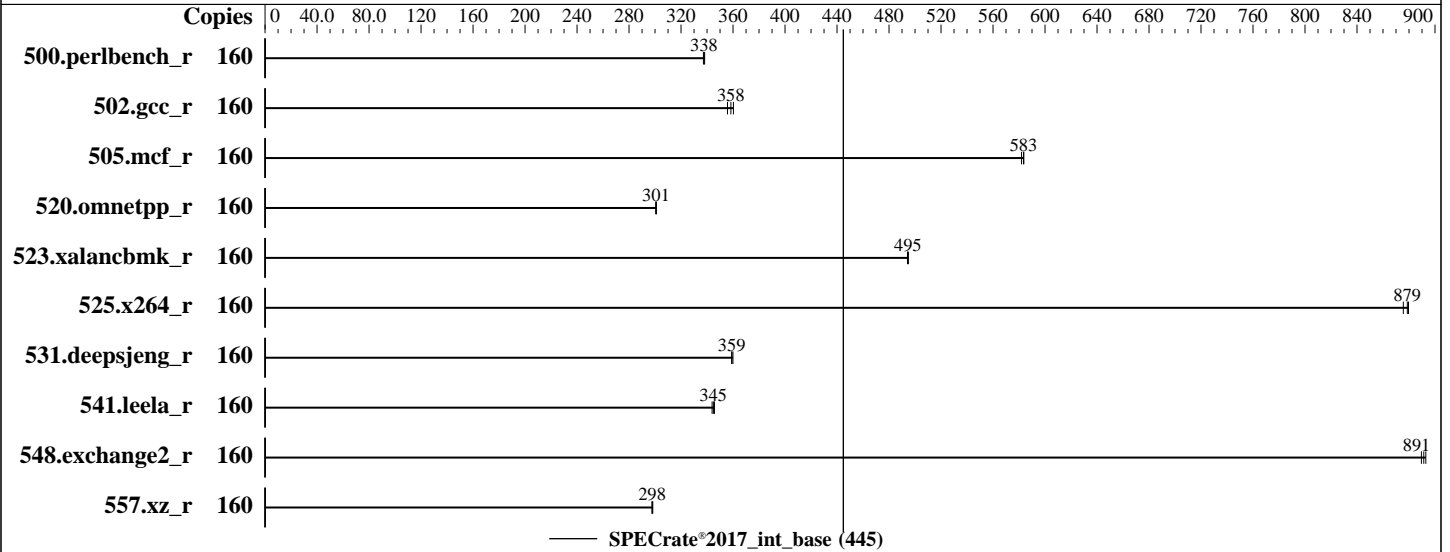

### Hardware

CPU Name: Intel Xeon Gold 6230T  
Max MHz: 3900  
Nominal: 2100  
Enabled: 80 cores, 4 chips, 2 threads/core  
Orderable: 2,3,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 27.5 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 800 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
Kernel 4.12.14-25.13-default  
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version PSE122R 1.53 released Aug-2019 tested as PSE121R 1.53 Jul-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	753	338	755	337	<b>754</b>	<b>338</b>							
502.gcc_r	160	<b>632</b>	<b>358</b>	629	360	637	356							
505.mcf_r	160	<b>443</b>	<b>583</b>	444	582	443	584							
520.omnetpp_r	160	<b>698</b>	<b>301</b>	698	301	697	301							
523.xalancbmk_r	160	342	494	<b>342</b>	<b>495</b>	341	495							
525.x264_r	160	<b>319</b>	<b>879</b>	319	880	320	876							
531.deepsjeng_r	160	511	359	509	360	<b>511</b>	<b>359</b>							
541.leela_r	160	770	344	<b>768</b>	<b>345</b>	766	346							
548.exchange2_r	160	471	890	<b>470</b>	<b>891</b>	469	893							
557.xz_r	160	<b>580</b>	<b>298</b>	579	298	580	298							

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 445

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
DCU Streamer Prefetcher set to Disable  
MONITOR/MWAIT set to Enable  
SNC set to Enable  
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-ulb8 Mon Sep 16 09:38:24 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6230T CPU @ 2.10GHz  
4 "physical id"s (chips)  
160 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 160  
On-line CPU(s) list: 0-159  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 445

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 6230T CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s): 40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s): 43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s): 60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s): 63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 96329 MB
node 0 free: 95998 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 96757 MB
node 1 free: 93517 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 96757 MB
node 2 free: 96583 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 445

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```

node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 96757 MB
node 3 free: 96563 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 96757 MB
node 4 free: 96499 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 96757 MB
node 5 free: 96346 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 96757 MB
node 6 free: 96590 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 96754 MB
node 7 free: 96582 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      792196720 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:15"

```

uname -a:

```

Linux linux-ulb8 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Sep 16 09:37

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 744G 59G 686G 8% /

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE121R-1.53]- 07/03/2019  
Memory:  
48x NO DIMM NO DIMM  
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11  
  
C++ benchmarks:  
icpc -m64  
  
Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc  
  
C++ benchmarks:  
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Gold 6230T)

SPECrate®2017\_int\_base = 445

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64

-lqkmalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-15 21:38:24-0400.

Report generated on 2019-11-12 14:58:20 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.