



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 208

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

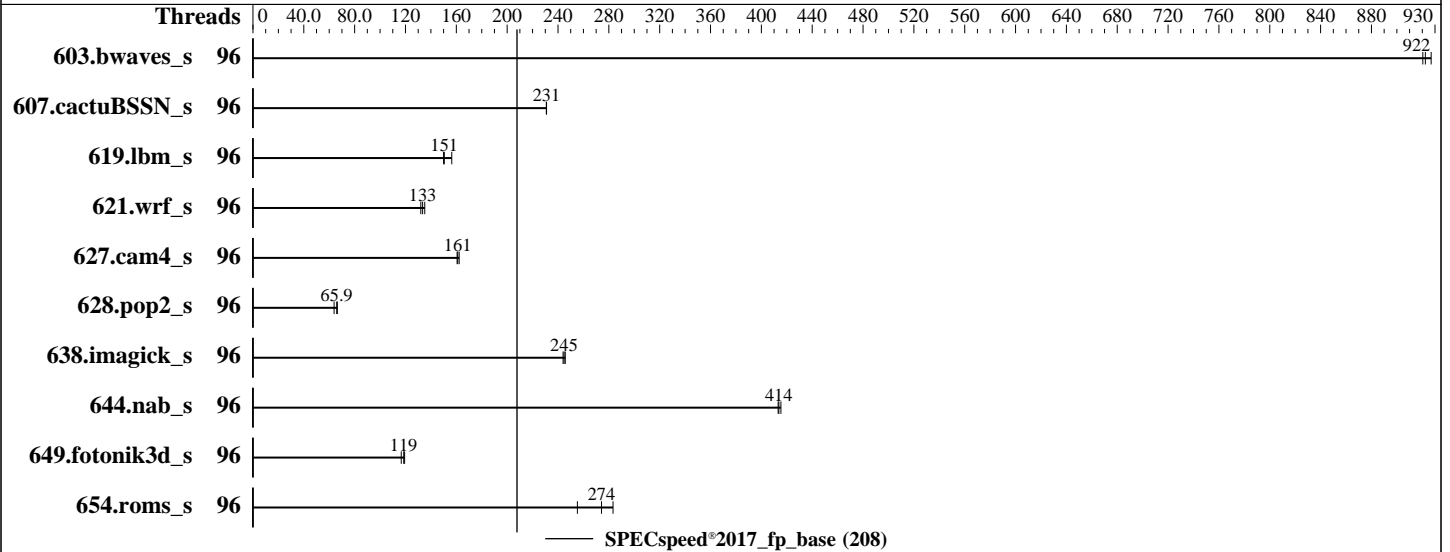

### Hardware

CPU Name: Intel Xeon Platinum 8260  
 Max MHz: 3900  
 Nominal: 2400  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 800 GB tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
 Kernel 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: Disable



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 208

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2019  
Hardware Availability: Apr-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	63.6	927	<b>64.0</b>	<b>922</b>	64.1	920							
607.cactuBSSN_s	96	72.2	231	72.2	231	<b>72.2</b>	<b>231</b>							
619.lbm_s	96	33.5	156	<b>34.8</b>	<b>151</b>	34.9	150							
621.wrf_s	96	100	132	<b>99.1</b>	<b>133</b>	97.8	135							
627.cam4_s	96	55.2	161	54.6	162	<b>55.0</b>	<b>161</b>							
628.pop2_s	96	186	63.8	<b>180</b>	<b>65.9</b>	179	66.4							
638.imagick_s	96	<b>58.9</b>	<b>245</b>	59.1	244	58.7	246							
644.nab_s	96	42.1	415	<b>42.2</b>	<b>414</b>	42.3	413							
649.fotonik3d_s	96	78.1	117	76.4	119	<b>76.9</b>	<b>119</b>							
654.roms_s	96	61.7	255	55.6	283	<b>57.4</b>	<b>274</b>							

SPECspeed®2017\_fp\_base = 208

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 208

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
Memory Power Manangement set to Automatic  
MONITOR/MWAIT set to Enable  
Trusted Execution Technology set to Enable  
Stale AtoS set to Enable

```
sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Sat Oct 26 08:52:03 2019
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
 4 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 16 17 18 19 20 21 22 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 208

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping:           6
CPU MHz:            2400.000
BogoMIPS:           4800.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           36608K
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191

```

```

Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavc xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99
100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 0 size: 196277 MB
node 0 free: 191467 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
142 143
node 1 size: 196608 MB
node 1 free: 182914 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
166 167
node 2 size: 196608 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 208

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```

node 2 free: 191982 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189
190 191
node 3 size: 196608 MB
node 3 free: 187772 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:          792236452 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux

```

#### Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 208

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

run-level 3 Oct 26 08:50

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4  
Filesystem      Type      Size   Used Avail Use% Mounted on  
tmpfs           tmpfs   800G   8.3G  792G   2% /home

From /sys/devices/virtual/dmi/id  
BIOS:      Lenovo -[IVE141E-2.30]- 07/02/2019  
Vendor:    Lenovo  
Product:   Lenovo ThinkSystem SN850 -[7X15NVz000]-  
Serial:    1234567890

Additional information from dmidecode follows.   WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C                   | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 208

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Oct-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 208

ThinkSystem SN850  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Base Portability Flags (Continued)

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-25 20:52:02-0400.

Report generated on 2019-11-12 14:58:19 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.