



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55


Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

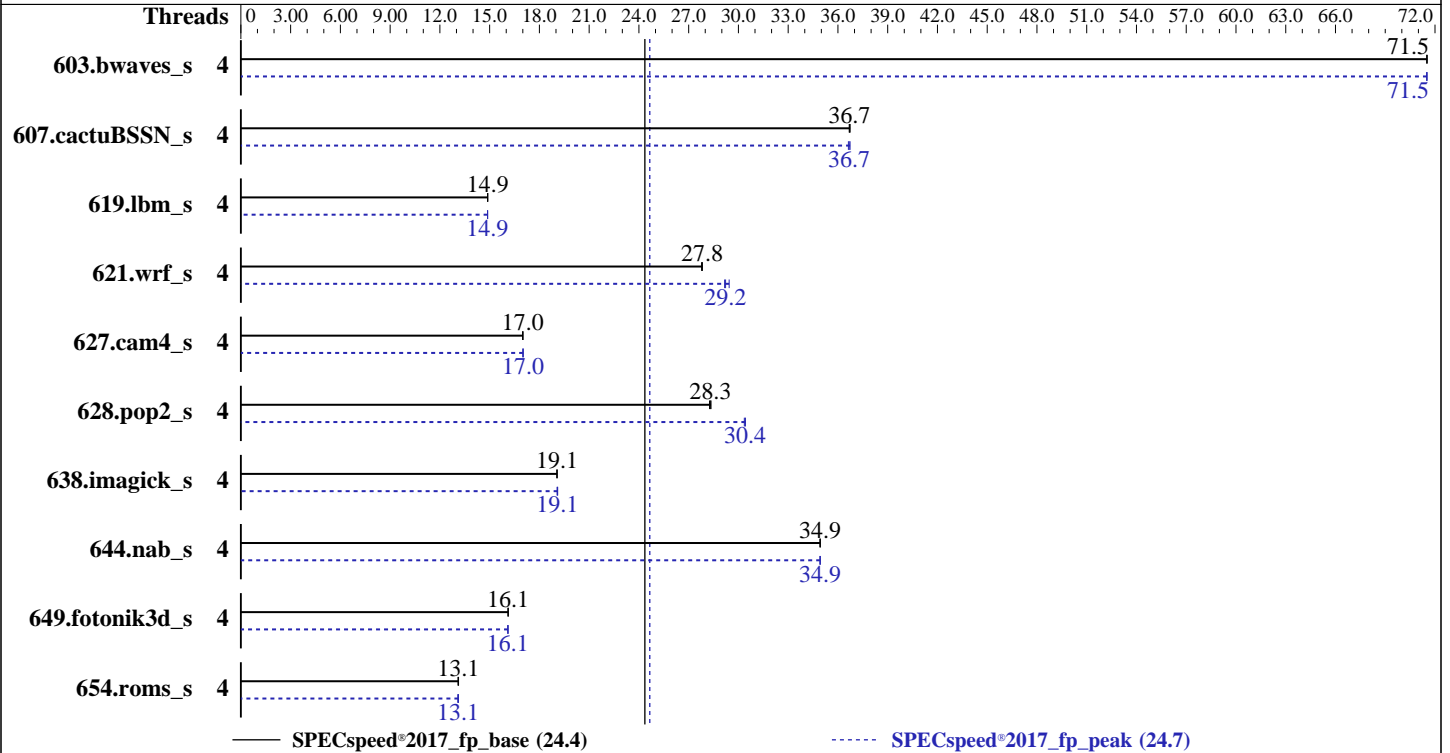

### Hardware

CPU Name: Intel Core i3-9100  
 Max MHz: 4200  
 Nominal: 3600  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 6 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version 2.1.6 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2019  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	<b>825</b>	<b>71.5</b>	825	71.5	825	71.5	4	825	71.5	825	71.5	<b>825</b>	<b>71.5</b>
607.cactuBSSN_s	4	<b>454</b>	<b>36.7</b>	454	36.7	454	36.7	4	455	36.6	<b>454</b>	<b>36.7</b>	454	36.7
619.lbm_s	4	352	14.9	<b>352</b>	<b>14.9</b>	352	14.9	4	352	14.9	352	14.9	<b>352</b>	<b>14.9</b>
621.wrf_s	4	475	27.8	<b>475</b>	<b>27.8</b>	476	27.8	4	453	29.2	<b>453</b>	<b>29.2</b>	449	29.4
627.cam4_s	4	521	17.0	522	17.0	<b>521</b>	<b>17.0</b>	4	521	17.0	521	17.0	<b>521</b>	<b>17.0</b>
628.pop2_s	4	420	28.3	419	28.3	<b>419</b>	<b>28.3</b>	4	390	30.4	<b>391</b>	<b>30.4</b>	391	30.4
638.imagick_s	4	<b>757</b>	<b>19.1</b>	757	19.1	757	19.1	4	757	19.1	<b>755</b>	<b>19.1</b>	755	19.1
644.nab_s	4	<b>500</b>	<b>34.9</b>	500	34.9	500	34.9	4	500	34.9	500	34.9	<b>500</b>	<b>34.9</b>
649.fotonik3d_s	4	<b>566</b>	<b>16.1</b>	566	16.1	566	16.1	4	<b>566</b>	<b>16.1</b>	566	16.1	566	16.1
654.roms_s	4	<b>1201</b>	<b>13.1</b>	1200	13.1	1203	13.1	4	<b>1202</b>	<b>13.1</b>	1200	13.1	1203	13.1

SPECspeed®2017\_fp\_base = 24.4

SPECspeed®2017\_fp\_peak = 24.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/lib/intel64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled  
 Virtualization Technology disabled  
 DCU Streamer Prefetcher disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 PCI ASPM L1 Link Power Management disabled

sysinfo program /home/cpu2017/ODM-SPECcpu2017-194/cpu2017/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on linux-g3ob Thu Nov 21 14:39:54 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Core(TM) i3-9100 CPU @ 3.60GHz  
 1 "physical id"s (chips)  
 4 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 4  
 siblings : 4  
 physical 0: cores 0 1 2 3

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 Address sizes: 39 bits physical, 48 bits virtual  
 CPU(s): 4  
 On-line CPU(s) list: 0-3  
 Thread(s) per core: 1  
 Core(s) per socket: 4  
 Socket(s): 1  
 NUMA node(s): 1  
 Vendor ID: GenuineIntel  
 CPU family: 6  
 Model: 158  
 Model name: Intel(R) Core(TM) i3-9100 CPU @ 3.60GHz  
 Stepping: 11

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55

Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

## Platform Notes (Continued)

```

CPU MHz:          3600.000
BogoMIPS:         7200.00
Virtualization:   VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         256K
L3 cache:         6144K
NUMA node0 CPU(s): 0-3

```

```

Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti
ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec
xgetbv1 xsaves dtherm ida arat pln pts md_clear flush_lld

```

```

/proc/cpuinfo cache data
cache size : 6144 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64259 MB
node 0 free: 56474 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo

```

```

MemTotal:        65801564 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*

```

```

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECSpeed®2017\_fp\_peak = 24.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2019  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Platform Notes (Continued)

```
uname -a:
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion
Microarchitectural Data Sampling:      Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown):              Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted Speculation, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
```

```
run-level 3 Nov 21 09:18 last=5
```

```
SPEC is set to: /home/cpu2017/ODM-SPECcpu2017-194/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   440G  42G  399G  10% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Dell Inc. 2.1.6 09/27/2018
Vendor:    Dell Inc.
Product:   PowerEdge T140
Product Family: PowerEdge
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
2x 00AD00000A02 HMA82GU7CJR8N-VK 16 GB 2 rank 2666
2x 00AD00000A06 HMA82GU7CJR8N-VK 16 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2019  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

Fortran benchmarks:  
ifort -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

```
638.imagick_s: -DSPEC_LP64
```

```
644.nab_s: -DSPEC_LP64
```

```
649.fotonik3d_s: -DSPEC_LP64
```

```
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

```
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-nostandard-realloc-lhs
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECSpeed®2017\_fp\_peak = 24.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d\_s: Same as 603.bwaves\_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 24.4

PowerEdge T140 (Intel Core i3-9100, 3.60 GHz)

SPECspeed®2017\_fp\_peak = 24.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Peak Optimization Flags (Continued)

627.cam4\_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-21 15:39:53-0500.

Report generated on 2019-12-13 10:30:15 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-12.