



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55


Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

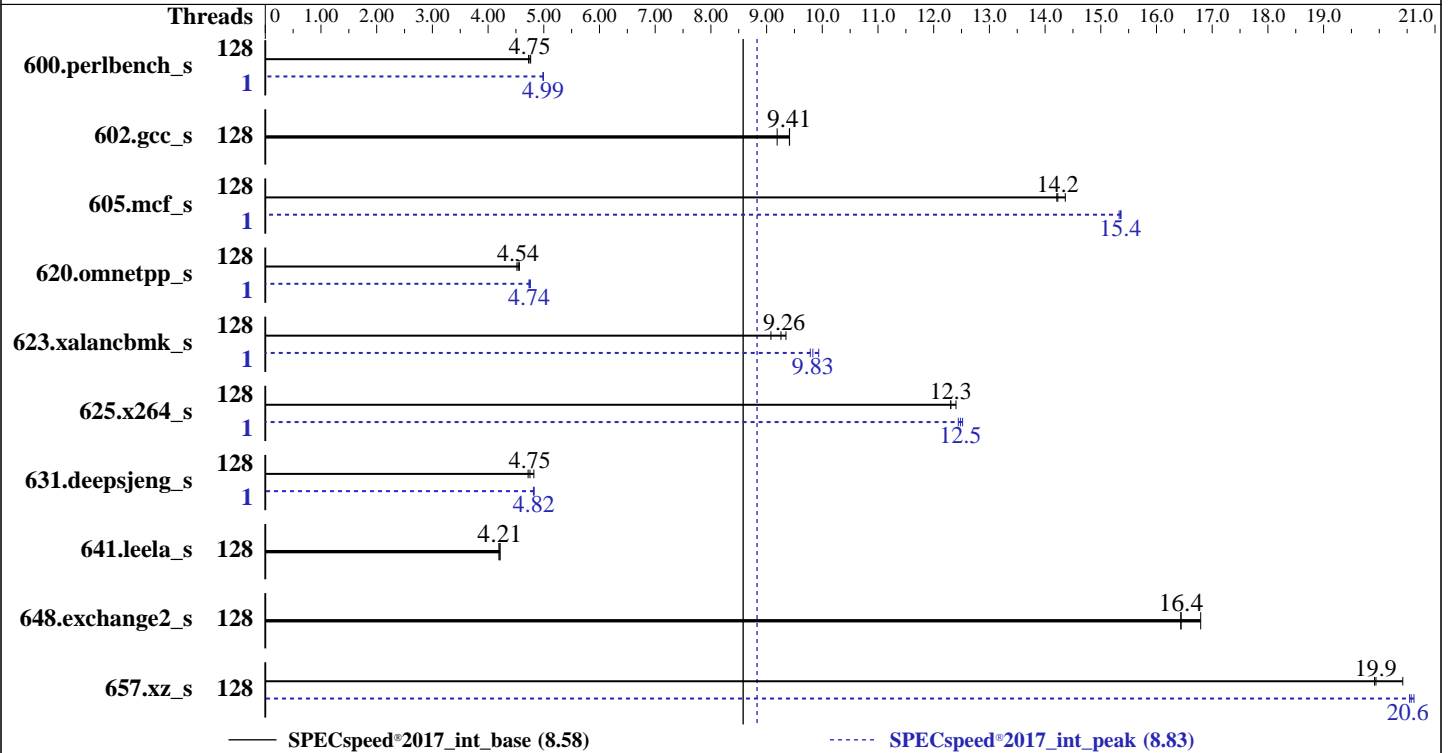

Hardware

CPU Name: AMD EPYC 7742
 Max MHz: 3400
 Nominal: 2250
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 2 x 960 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.4 released Nov-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	376	4.73	373	4.76	374	4.75	1	356	4.99	356	4.99	355	4.99
602.gcc_s	128	433	9.19	423	9.41	423	9.41	128	433	9.19	423	9.41	423	9.41
605.mcf_s	128	332	14.2	332	14.2	329	14.4	1	307	15.4	308	15.3	307	15.4
620.omnetpp_s	128	357	4.56	361	4.52	359	4.54	1	343	4.76	344	4.74	344	4.74
623.xalancbmk_s	128	153	9.26	152	9.35	156	9.08	1	144	9.83	143	9.94	145	9.78
625.x264_s	128	142	12.4	143	12.3	143	12.3	1	141	12.5	141	12.5	142	12.4
631.deepsjeng_s	128	302	4.75	304	4.72	297	4.82	1	297	4.82	297	4.82	298	4.81
641.leela_s	128	405	4.21	405	4.21	407	4.19	128	405	4.21	405	4.21	407	4.19
648.exchange2_s	128	179	16.4	179	16.4	175	16.8	128	179	16.4	179	16.4	175	16.8
657.xz_s	128	310	19.9	310	19.9	303	20.4	128	301	20.5	300	20.6	300	20.6

SPECspeed®2017_int_base = 8.58

SPECspeed®2017_int_peak = 8.83

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
  "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0
  /amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
OMP_STACKSIZE = "128M"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

General Notes (Continued)

jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

- NUMA Nodes Per Socket set to 4
- CCX as NUMA Domain set to Enabled
- System Profile set to Custom
- CPU Power Management set to Maximum Performance
- Memory Frequency set to Maximum Performance
- Turbo Boost Enabled
- Cstates set to Enabled
- Memory Patrol Scrub Disabled
- Memory Refresh Rate set to 1x
- PCI ASPM L1 Link Power Management Disabled
- Determinism Slider set to Power Determinism
- Efficiency Optimized Mode Disabled
- Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Sat Nov 16 03:17:41 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : AMD EPYC 7742 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
Address sizes:       43 bits physical, 48 bits virtual
CPU(s):              256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s):           2
NUMA node(s):       32
Vendor ID:           AuthenticAMD
CPU family:          23
Model:               49
Model name:          AMD EPYC 7742 64-Core Processor
Stepping:            0
CPU MHz:             2245.720
BogoMIPS:            4491.44
Virtualization:      AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            16384K
NUMA node0 CPU(s):  0-3,128-131
NUMA node1 CPU(s):  4-7,132-135
NUMA node2 CPU(s):  8-11,136-139
NUMA node3 CPU(s):  12-15,140-143
NUMA node4 CPU(s):  16-19,144-147
NUMA node5 CPU(s):  20-23,148-151
NUMA node6 CPU(s):  24-27,152-155
NUMA node7 CPU(s):  28-31,156-159
NUMA node8 CPU(s):  32-35,160-163
NUMA node9 CPU(s):  36-39,164-167
NUMA node10 CPU(s): 40-43,168-171
NUMA node11 CPU(s): 44-47,172-175
NUMA node12 CPU(s): 48-51,176-179
NUMA node13 CPU(s): 52-55,180-183
NUMA node14 CPU(s): 56-59,184-187
NUMA node15 CPU(s): 60-63,188-191
NUMA node16 CPU(s): 64-67,192-195
NUMA node17 CPU(s): 68-71,196-199
NUMA node18 CPU(s): 72-75,200-203
NUMA node19 CPU(s): 76-79,204-207
NUMA node20 CPU(s): 80-83,208-211
NUMA node21 CPU(s): 84-87,212-215
NUMA node22 CPU(s): 88-91,216-219
NUMA node23 CPU(s): 92-95,220-223
NUMA node24 CPU(s): 96-99,224-227
NUMA node25 CPU(s): 100-103,228-231

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node26 CPU(s): 104-107,232-235
 NUMA node27 CPU(s): 108-111,236-239
 NUMA node28 CPU(s): 112-115,240-243
 NUMA node29 CPU(s): 116-119,244-247
 NUMA node30 CPU(s): 120-123,248-251
 NUMA node31 CPU(s): 124-127,252-255

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
 pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
 constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
 pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
 fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
 perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
 fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
 clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
 flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
 rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 32 nodes (0-31)
node 0 cpus: 0 1 2 3 128 129 130 131
node 0 size: 15548 MB
node 0 free: 15339 MB
node 1 cpus: 4 5 6 7 132 133 134 135
node 1 size: 16126 MB
node 1 free: 15948 MB
node 2 cpus: 8 9 10 11 136 137 138 139
node 2 size: 16126 MB
node 2 free: 15958 MB
node 3 cpus: 12 13 14 15 140 141 142 143
node 3 size: 16125 MB
node 3 free: 15958 MB
node 4 cpus: 16 17 18 19 144 145 146 147
node 4 size: 16126 MB
node 4 free: 15944 MB
node 5 cpus: 20 21 22 23 148 149 150 151
node 5 size: 16126 MB
node 5 free: 15912 MB
node 6 cpus: 24 25 26 27 152 153 154 155
node 6 size: 16096 MB
node 6 free: 15887 MB
node 7 cpus: 28 29 30 31 156 157 158 159
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 7 size: 16125 MB
node 7 free: 15745 MB
node 8 cpus: 32 33 34 35 160 161 162 163
node 8 size: 16126 MB
node 8 free: 15960 MB
node 9 cpus: 36 37 38 39 164 165 166 167
node 9 size: 16126 MB
node 9 free: 15960 MB
node 10 cpus: 40 41 42 43 168 169 170 171
node 10 size: 16126 MB
node 10 free: 15960 MB
node 11 cpus: 44 45 46 47 172 173 174 175
node 11 size: 16125 MB
node 11 free: 15958 MB
node 12 cpus: 48 49 50 51 176 177 178 179
node 12 size: 16126 MB
node 12 free: 15940 MB
node 13 cpus: 52 53 54 55 180 181 182 183
node 13 size: 16126 MB
node 13 free: 15959 MB
node 14 cpus: 56 57 58 59 184 185 186 187
node 14 size: 16126 MB
node 14 free: 15961 MB
node 15 cpus: 60 61 62 63 188 189 190 191
node 15 size: 16113 MB
node 15 free: 15948 MB
node 16 cpus: 64 65 66 67 192 193 194 195
node 16 size: 16126 MB
node 16 free: 15963 MB
node 17 cpus: 68 69 70 71 196 197 198 199
node 17 size: 16126 MB
node 17 free: 15966 MB
node 18 cpus: 72 73 74 75 200 201 202 203
node 18 size: 16126 MB
node 18 free: 15966 MB
node 19 cpus: 76 77 78 79 204 205 206 207
node 19 size: 16125 MB
node 19 free: 15963 MB
node 20 cpus: 80 81 82 83 208 209 210 211
node 20 size: 16126 MB
node 20 free: 15965 MB
node 21 cpus: 84 85 86 87 212 213 214 215
node 21 size: 16126 MB
node 21 free: 15964 MB
node 22 cpus: 88 89 90 91 216 217 218 219
node 22 size: 16126 MB
node 22 free: 15968 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 23 cpus: 92 93 94 95 220 221 222 223
node 23 size: 16125 MB
node 23 free: 15967 MB
node 24 cpus: 96 97 98 99 224 225 226 227
node 24 size: 16126 MB
node 24 free: 15963 MB
node 25 cpus: 100 101 102 103 228 229 230 231
node 25 size: 16126 MB
node 25 free: 15968 MB
node 26 cpus: 104 105 106 107 232 233 234 235
node 26 size: 16126 MB
node 26 free: 15967 MB
node 27 cpus: 108 109 110 111 236 237 238 239
node 27 size: 16125 MB
node 27 free: 15937 MB
node 28 cpus: 112 113 114 115 240 241 242 243
node 28 size: 16126 MB
node 28 free: 15966 MB
node 29 cpus: 116 117 118 119 244 245 246 247
node 29 size: 16126 MB
node 29 free: 15964 MB
node 30 cpus: 120 121 122 123 248 249 250 251
node 30 size: 16126 MB
node 30 free: 15966 MB
node 31 cpus: 124 125 126 127 252 253 254 255
node 31 size: 16122 MB
node 31 free: 15965 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
9:	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
10:	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11:	12	12	12	12	12	12	12	12	11	11	11	10	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
13:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
14:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
15:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	11	10
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
16:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	11
17:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11
18:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11
19:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	11	10
20:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
21:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
22:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12
27:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12
28:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	10	11	11	11	11	11	11	11	11	11	11	11	11
29:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	11	10	11	11	11	11	11	11	11	11	11	11	11
30:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	11	11	10	11	11	11	11	11	11	11	11	11	11
31:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	11	11	11	10	11	11	11	11	11	11	11	11	10

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      527783152 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

run-level 3 Nov 15 11:26 last=5

SPEC is set to: /root/cpu2017-1.1.0

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   440G   41G  400G  10% /
```

From /sys/devices/virtual/dmi/id

```
BIOS:      Dell Inc. 1.2.4 11/05/2019
Vendor:    Dell Inc.
Product:   PowerEdge R7525
Product Family: PowerEdge
Serial:    1234567
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 7x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
- 8x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
- 1x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
- 16x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

```

=====
C++       | 623.xalancbmk_s(peak)
=====

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

C++ | 623.xalancbmk_s(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

602.gcc_s: basepeak = yes

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

657.xz_s (continued):

```

-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang

```

C++ benchmarks:

620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize

```

-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang

```

623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```

-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc

```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.58

PowerEdge R7525 (AMD EPYC 7742, 2.25 GHz)

SPECspeed®2017_int_peak = 8.83

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk_s: -Wno-return-type

-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-16 04:17:41-0500.

Report generated on 2019-12-26 11:33:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.