



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97


Test Date: Mar-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Nov-2019

Tested by: Altos Computing Inc.

Software Availability: Jan-2020

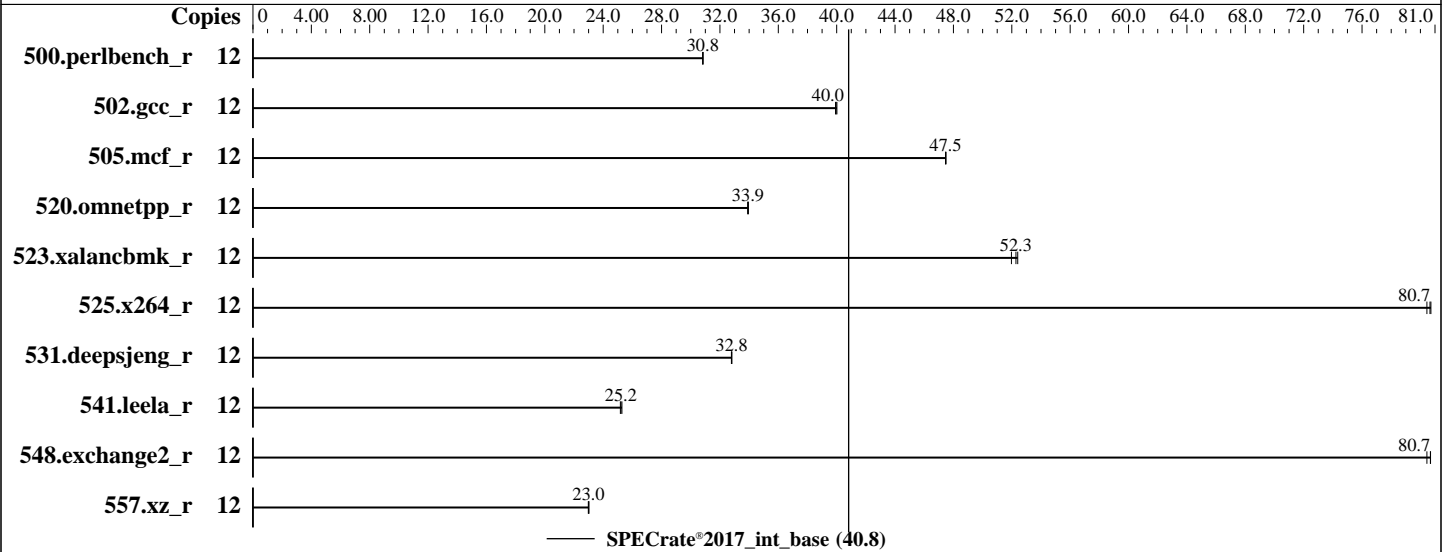

Hardware

CPU Name: Intel Xeon Bronze 3204
 Max MHz: 1900
 Nominal: 1900
 Enabled: 12 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 1Rx4 PC4-2933V-R, running at 2133)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: Ubuntu 19.10
 Kernel 5.3.0-40-generic
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler Build 20190815 for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler Build 20190815 for Linux
 Parallel: No
 Firmware: Version R11 released Feb-2020
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usag



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Date: Mar-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Nov-2019

Tested by: Altos Computing Inc.

Software Availability: Jan-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	12	619	30.8	620	30.8	620	30.8									
502.gcc_r	12	426	39.9	425	40.0	425	40.0									
505.mcf_r	12	409	47.5	408	47.5	409	47.5									
520.omnetpp_r	12	464	33.9	464	33.9	464	33.9									
523.xalancbmk_r	12	242	52.4	244	52.0	242	52.3									
525.x264_r	12	260	80.7	261	80.7	261	80.4									
531.deepsjeng_r	12	419	32.8	419	32.8	419	32.8									
541.leela_r	12	788	25.2	786	25.3	789	25.2									
548.exchange2_r	12	391	80.4	390	80.7	390	80.7									
557.xz_r	12	563	23.0	564	23.0	563	23.0									

SPECrate®2017_int_base = 40.8

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jan-2020

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Power Policy Quick Settings set to Performance

IMC set to 1-way interleaving

Sub_NUMA Cluster set to enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on r389f4 Wed Mar 11 09:01:17 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 46 bits physical, 48 bits virtual

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 1

Core(s) per socket: 6

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Date: Mar-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Nov-2019

Tested by: Altos Computing Inc.

Software Availability: Jan-2020

Platform Notes (Continued)

```

CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
Stepping:                  6
CPU MHz:                   800.012
CPU max MHz:               1900.0000
CPU min MHz:               800.0000
BogoMIPS:                  3800.00
Virtualization:            VT-x
L1d cache:                 384 KiB
L1i cache:                 384 KiB
L2 cache:                  12 MiB
L3 cache:                  16.5 MiB
NUMA node0 CPU(s):        0-5
NUMA node1 CPU(s):        6-11
Vulnerability Itlb multihit: KVM: Mitigation: Split huge pages
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Tsx async abort: Mitigation; TSX disabled
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsaveavx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bml1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 192118 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jan-2020

Platform Notes (Continued)

```
node 0 free: 190874 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 193509 MB
node 1 free: 192524 MB
node distances:
node    0    1
  0:   10   21
  1:   21   10
```

```
From /proc/meminfo
MemTotal:          394882912 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 19.10
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="19.10 (Eoan Ermine)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 19.10"
VERSION_ID="19.10"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux r389f4 5.3.0-40-generic #32-Ubuntu SMP Fri Jan 31 20:24:34 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit:          KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
tsx_async_abort:       Mitigation: TSX disabled
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jan-2020

Platform Notes (Continued)

run-level 5 Mar 11 08:54

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	219G	23G	186G	11%	/

```
From /sys/devices/virtual/dmi/id
BIOS: GIGABYTE R11 02/25/2020
Vendor: ALTOS
Product: BrainSphere R389 F4
Product Family: Server
Serial: GIGBN8521A0007
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory: 24x Samsung M393A2K40CB2-CVF 16 GB 1 rank 2933

(End of data from sysinfo program)

The build date 20190815 in sw_compiler is correct, but the date in the compiler version notes is not.

Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
=====
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran   | 548.exchange2_r(base)
=====
```

(Continued on next page)



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate[®]2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate[®]2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jan-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -flto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -flto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 40.8

BrainSphere R369 F4 (Intel Xeon Bronze 3204)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Altos Computing Inc.

Tested by: Altos Computing Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jan-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin

-lqkmalloc

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revA.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-11 05:01:16-0400.

Report generated on 2020-04-30 11:08:05 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-03.