



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006


Test Date: Mar-2020

Test Sponsor: NEC Corporation

Hardware Availability: Jul-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

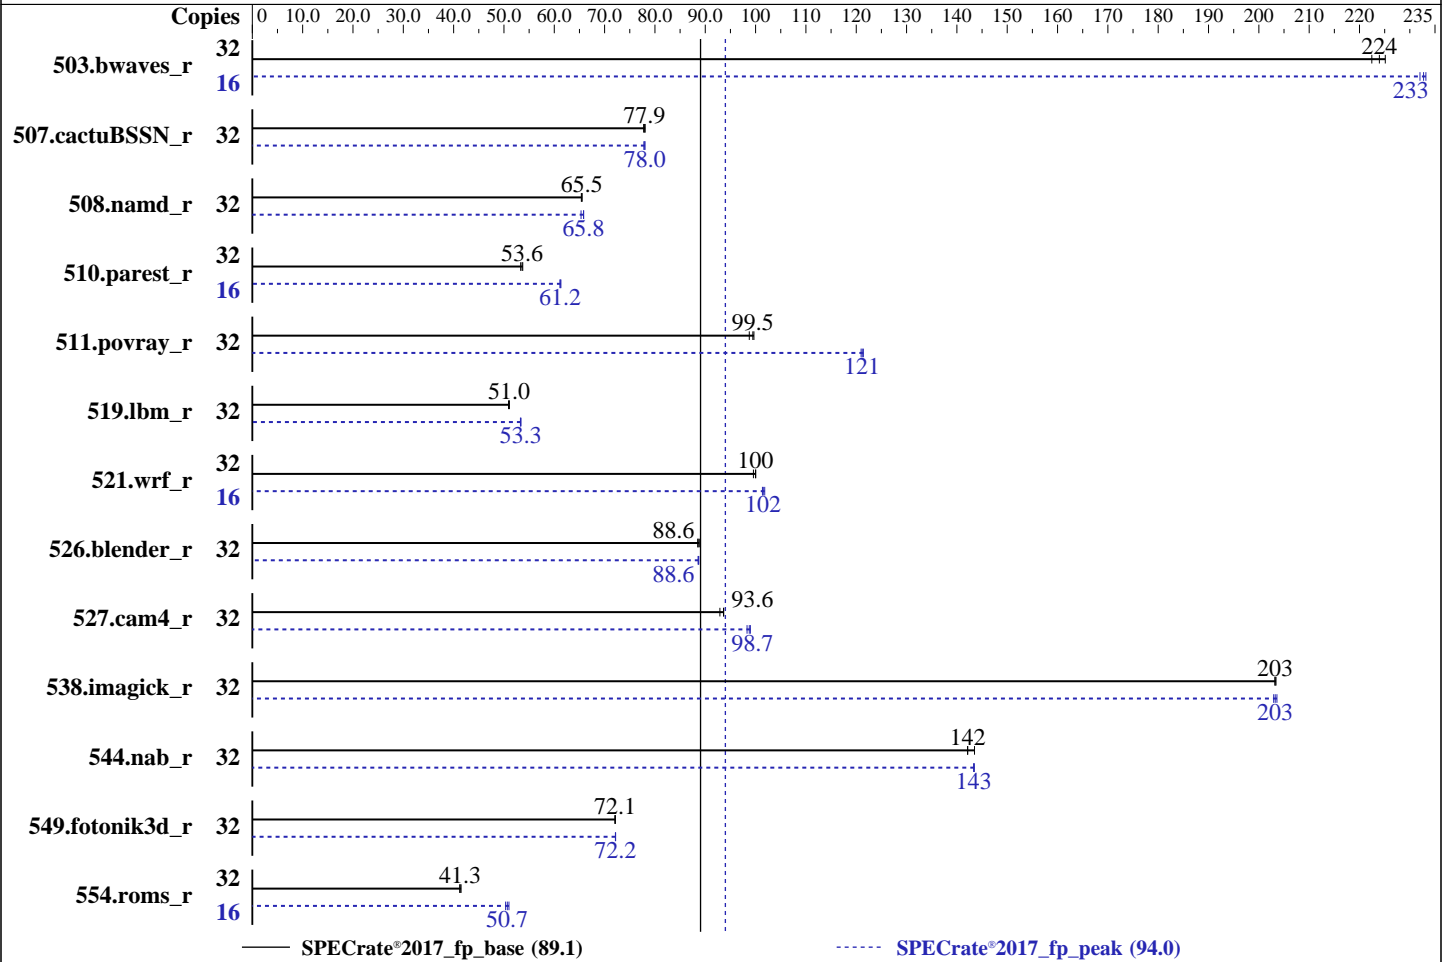

### Hardware

CPU Name: Intel Xeon Gold 5218  
 Max MHz: 3900  
 Nominal: 2300  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 96 GB (6 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.1.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: NEC BIOS Version U31 v2.22 11/13/2019 released Mar-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1443	222	<b>1433</b>	<b>224</b>	1425	225	16	692	232	<b>689</b>	<b>233</b>	688	233
507.cactuBSSN_r	32	521	77.7	<b>520</b>	<b>77.9</b>	519	78.1	32	<b>519</b>	<b>78.0</b>	519	78.0	521	77.8
508.namd_r	32	465	65.4	464	65.5	<b>464</b>	<b>65.5</b>	32	462	65.8	<b>462</b>	<b>65.8</b>	465	65.3
510.parest_r	32	1570	53.3	1558	53.7	<b>1562</b>	<b>53.6</b>	16	683	61.3	<b>684</b>	<b>61.2</b>	685	61.1
511.povray_r	32	757	98.7	<b>751</b>	<b>99.5</b>	750	99.7	32	<b>617</b>	<b>121</b>	615	121	618	121
519.lbm_r	32	661	51.1	662	50.9	<b>661</b>	<b>51.0</b>	32	632	53.4	<b>632</b>	<b>53.3</b>	633	53.3
521.wrf_r	32	<b>717</b>	<b>100</b>	717	100	720	99.6	16	352	102	<b>353</b>	<b>102</b>	354	101
526.blender_r	32	549	88.8	<b>550</b>	<b>88.6</b>	551	88.5	32	549	88.7	550	88.6	<b>550</b>	<b>88.6</b>
527.cam4_r	32	602	92.9	<b>598</b>	<b>93.6</b>	597	93.7	32	569	98.3	566	99.0	<b>567</b>	<b>98.7</b>
538.imagick_r	32	<b>392</b>	<b>203</b>	391	203	392	203	32	392	203	<b>392</b>	<b>203</b>	391	204
544.nab_r	32	375	144	379	142	<b>379</b>	<b>142</b>	32	<b>376</b>	<b>143</b>	376	143	375	143
549.fotonik3d_r	32	<b>1730</b>	<b>72.1</b>	1731	72.1	1729	72.1	32	<b>1728</b>	<b>72.2</b>	1728	72.2	1729	72.1
554.roms_r	32	1226	41.5	<b>1231</b>	<b>41.3</b>	1234	41.2	16	<b>502</b>	<b>50.7</b>	499	51.0	505	50.3

SPECrate®2017\_fp\_base = **89.1**

SPECrate®2017\_fp\_peak = **94.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

### General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

- Thermal Configuration: Maximum Cooling
- Workload Profile: General Throughput Compute
- Memory Patrol Scrubbing: Disabled
- LLC Dead Line Allocation: Disabled
- LLC Prefetch: Enabled
- Enhanced Processor Performance: Enabled
- Workload Profile: Custom
- Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on rl20h1e Mon Mar 23 08:56:21 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz  
1 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jul-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     16
Socket(s):               1
NUMA node(s):           2
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
Stepping:                6
CPU MHz:                 2300.000
BogoMIPS:                4600.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                22528K
NUMA node0 CPU(s):      0-7,16-23
NUMA node1 CPU(s):      8-15,24-31
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 48809 MB
node 0 free: 47350 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 49151 MB
node 1 free: 47741 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jul-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:          98654124 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

uname -a:
Linux r120h1e 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):          Mitigation: Load fences, usercopy/swapgs
barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Full retpoline, IBPB

run-level 3 Mar 23 08:50

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  908G   47G  816G   6% /

From /sys/devices/virtual/dmi/id
BIOS:          NEC U31 11/13/2019
Vendor:        NEC
Product:       Express5800/R120h-1E
Serial:        7CE721P1MV

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jul-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x HPE P03050-091 16 GB 2 rank 2933  
10x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory speed, the correct configured memory speed is 2666 MT/s. The dmidecode description should be as follows:  
6x HPE P03050-091 16 GB 2 rank 2933, configured at 2666

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

### Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Jul-2019

Software Availability: Sep-2019

## Peak Optimization Flags (Continued)

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 89.1

Express5800/R120h-1E (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 94.0

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Mar-2020

**Hardware Availability:** Jul-2019

**Software Availability:** Sep-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-22 19:56:21-0400.

Report generated on 2020-04-14 14:03:42 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.