



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10


(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

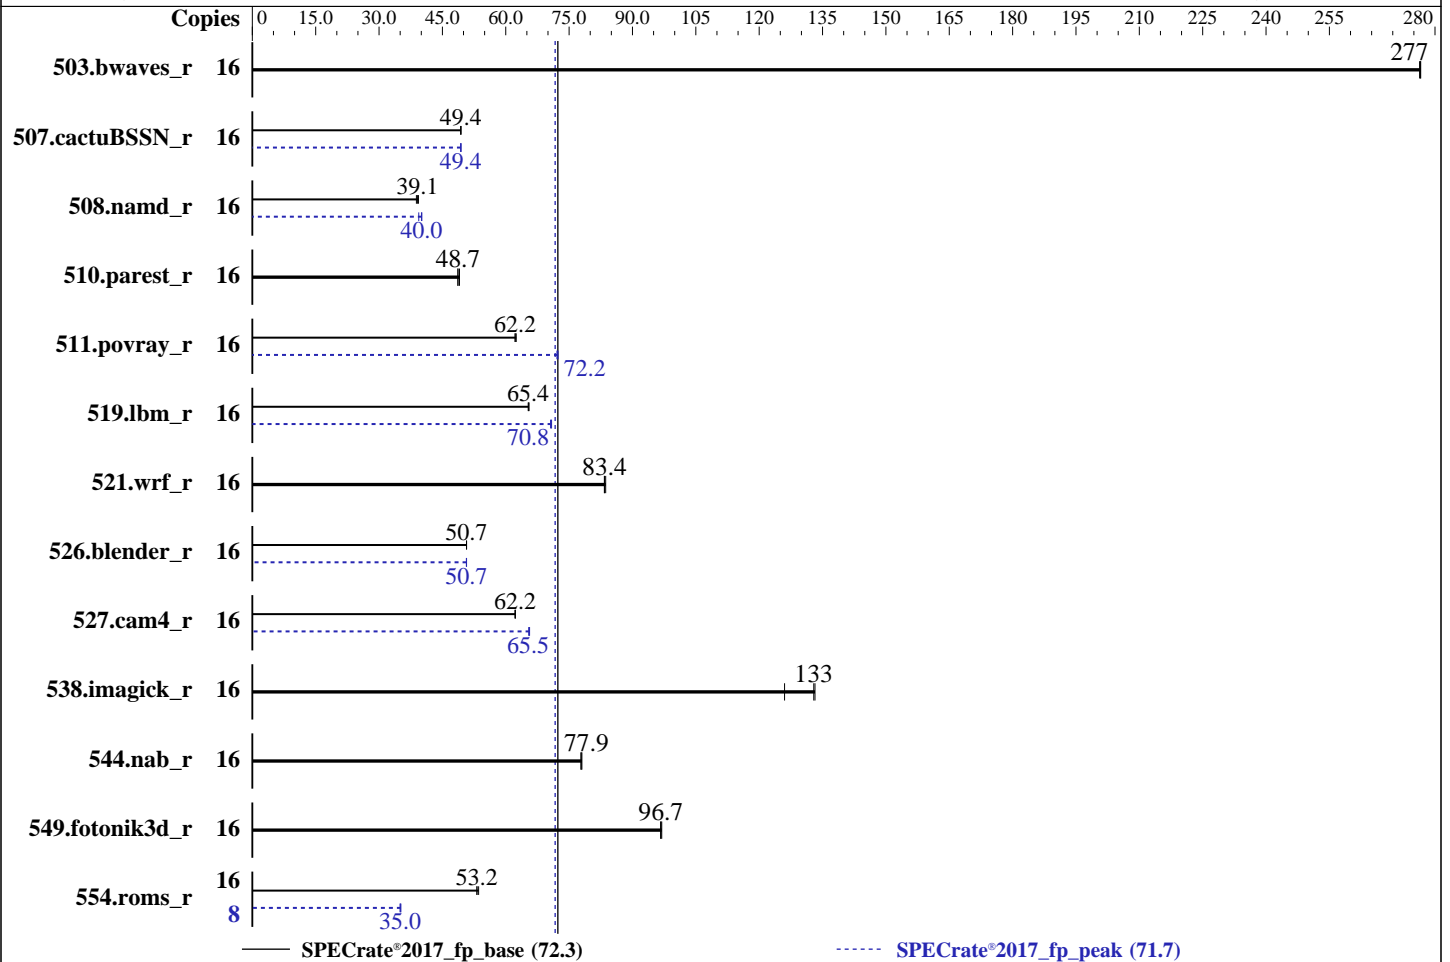

Hardware

CPU Name: Intel Xeon Bronze 3206R
 Max MHz: 1900
 Nominal: 1900
 Enabled: 16 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R, running at 2133)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux;
 Parallel: No
 Firmware: HPE BIOS Version U30 v2.22 (11/13/2019) released Apr-2020
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	581	276	580	277	580	277	16	581	276	580	277	580	277
507.cactuBSSN_r	16	410	49.4	410	49.4	411	49.3	16	410	49.4	410	49.4	411	49.3
508.namd_r	16	391	38.8	386	39.3	389	39.1	16	386	39.4	379	40.1	380	40.0
510.parest_r	16	853	49.0	860	48.7	860	48.7	16	853	49.0	860	48.7	860	48.7
511.povray_r	16	601	62.2	600	62.2	598	62.5	16	518	72.1	517	72.2	516	72.4
519.lbm_r	16	258	65.4	258	65.3	258	65.5	16	239	70.6	238	70.8	238	70.8
521.wrf_r	16	428	83.7	430	83.4	430	83.3	16	428	83.7	430	83.4	430	83.3
526.blender_r	16	481	50.7	481	50.7	480	50.7	16	481	50.7	480	50.7	481	50.7
527.cam4_r	16	450	62.2	450	62.2	450	62.3	16	428	65.4	426	65.6	427	65.5
538.imagick_r	16	299	133	299	133	316	126	16	299	133	299	133	316	126
544.nab_r	16	345	78.0	346	77.9	346	77.8	16	345	78.0	346	77.9	346	77.8
549.fotonik3d_r	16	643	96.9	644	96.7	645	96.7	16	643	96.9	644	96.7	645	96.7
554.roms_r	16	475	53.6	478	53.2	478	53.2	8	363	35.0	361	35.2	363	35.0

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Jun-2019

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

```

=====
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
=====

```

Platform Notes

BIOS Configuration:

```

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Enhanced Processor Performance set to Enabled
Workload Profile set to General Throughput Compute
Workload Profile set to Custom
Energy/Performance Bias set to Balanced Power

```

```

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-r6ge Tue Mar 10 08:18:47 2020

```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

```

From lscpu:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Platform Notes (Continued)

```

Byte Order:           Little Endian
Address sizes:       46 bits physical, 48 bits virtual
CPU(s):              16
On-line CPU(s) list: 0-15
Thread(s) per core:  1
Core(s) per socket:  8
Socket(s):           2
NUMA node(s):        2
Vendor ID:           GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping:             7
CPU MHz:              1900.000
BogoMIPS:             3800.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            11264K
NUMA node0 CPU(s):   0-3,8-11
NUMA node1 CPU(s):   4-7,12-15
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 193099 MB
node 0 free: 190912 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 193533 MB
node 1 free: 193120 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Platform Notes (Continued)

node distances:

```
node 0 1
0: 10 21
1: 21 10
```

From /proc/meminfo

```
MemTotal: 395913020 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-r6ge 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 Mar 10 08:16

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 371G 150G 221G 41% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: HPE U30 11/13/2019
Vendor: HPE
Product: ProLiant DL380 Gen10
Product Family: ProLiant
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Platform Notes (Continued)

Serial: 2M294204YX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Jun-2019

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Jun-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Jun-2019

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.90 GHz, Intel Xeon Bronze 3206R)

SPECrate®2017_fp_base = 72.3

SPECrate®2017_fp_peak = 71.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2020

Hardware Availability: Apr-2020

Software Availability: Jun-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-09 22:48:46-0400.

Report generated on 2020-04-14 14:05:09 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.