



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation


SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2020  
Hardware Availability: Dec-2019  
Software Availability: Sep-2019

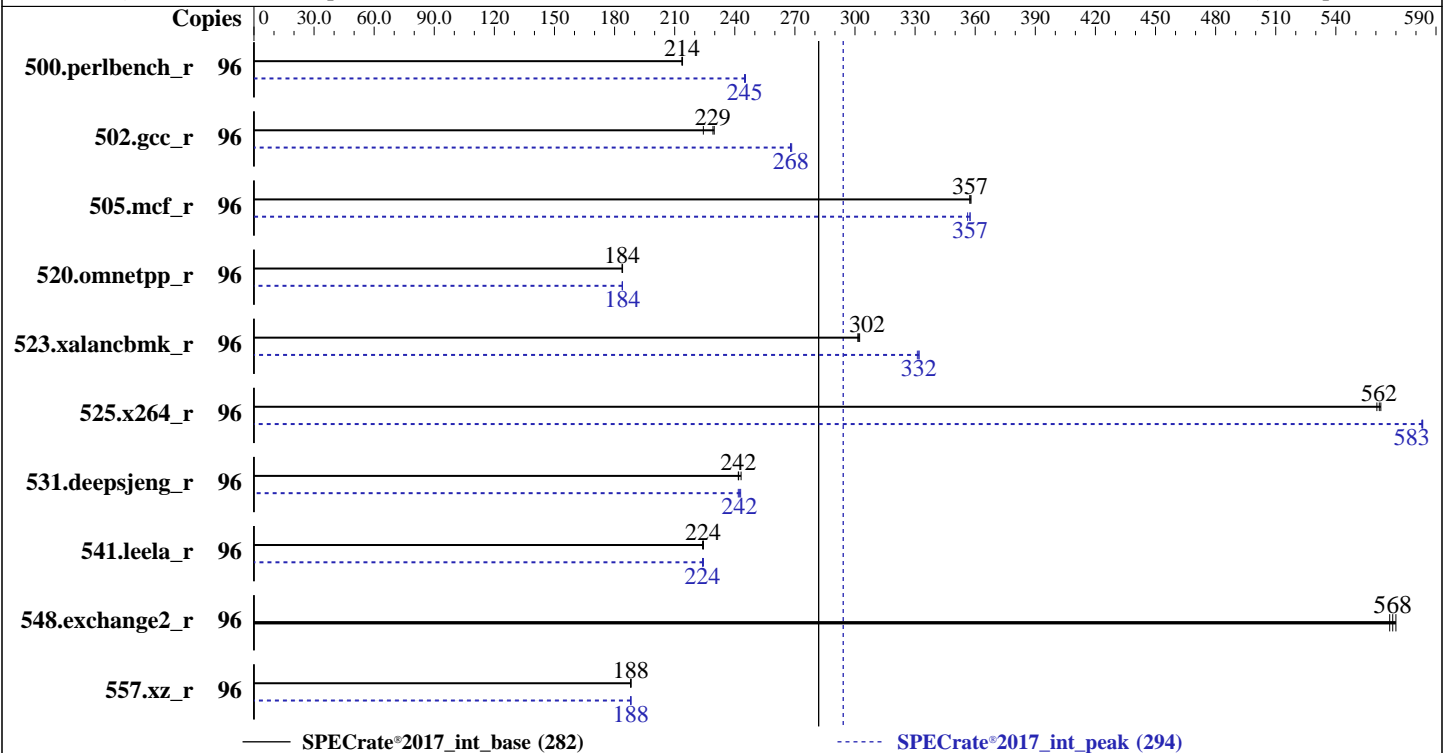

### Hardware

CPU Name: Intel Xeon Platinum 8260  
 Max MHz: 3900  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.1.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: NEC BIOS Version U32 v2.22 11/13/2019 released Mar-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2020  
Hardware Availability: Dec-2019  
Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	<b>715</b>	<b>214</b>	715	214	714	214	96	<b>624</b>	<b>245</b>	623	245	624	245
502.gcc_r	96	<b>593</b>	<b>229</b>	606	224	592	230	96	508	268	506	268	<b>507</b>	<b>268</b>
505.mcf_r	96	<b>434</b>	<b>357</b>	434	357	433	358	96	<b>434</b>	<b>357</b>	434	357	436	356
520.omnetpp_r	96	685	184	<b>685</b>	<b>184</b>	685	184	96	685	184	<b>685</b>	<b>184</b>	685	184
523.xalancbmk_r	96	336	301	335	302	<b>336</b>	<b>302</b>	96	305	332	306	331	<b>305</b>	<b>332</b>
525.x264_r	96	<b>299</b>	<b>562</b>	300	561	299	562	96	288	583	<b>288</b>	<b>583</b>	288	583
531.deepsjeng_r	96	<b>455</b>	<b>242</b>	452	243	455	242	96	453	243	455	242	<b>454</b>	<b>242</b>
541.leela_r	96	710	224	709	224	<b>709</b>	<b>224</b>	96	709	224	<b>710</b>	<b>224</b>	710	224
548.exchange2_r	96	441	570	444	567	<b>442</b>	<b>568</b>	96	441	570	444	567	<b>442</b>	<b>568</b>
557.xz_r	96	551	188	<b>551</b>	<b>188</b>	552	188	96	<b>551</b>	<b>188</b>	551	188	551	188

SPECrate®2017\_int\_base = **282**

SPECrate®2017\_int\_peak = **294**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling  
Workload Profile: General Throughput Compute  
Memory Patrol Scrubbing: Disabled  
LLC Dead Line Allocation: Disabled  
LLC Prefetch: Enabled  
Enhanced Processor Performance: Enabled  
Workload Profile: Custom  
Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on r120h1m Wed May 20 08:43:01 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              96
On-line CPU(s) list: 0-95
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):           2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping:             6
CPU MHz:              2400.000
BogoMIPS:             4800.00
Virtualization:       VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:             1024K
L3 cache:            36608K
NUMA node0 CPU(s):   0-11,48-59
NUMA node1 CPU(s):   12-23,60-71
NUMA node2 CPU(s):   24-35,72-83
NUMA node3 CPU(s):   36-47,84-95
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 97960 MB
node 0 free: 95533 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

node 1 size: 98304 MB
node 1 free: 95963 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 98304 MB
node 2 free: 95955 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 98303 MB
node 3 free: 95989 MB
node distances:
node  0  1  2  3
  0:  10  21  31  31
  1:  21  10  31  31
  2:  31  31  10  21
  3:  31  31  21  10

```

```

From /proc/meminfo
MemTotal:      395913864 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

```

```

uname -a:
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, usercopy/swaps
barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB

run-level 3 May 20 08:37

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	135G	727G	16%	/

```

From /sys/devices/virtual/dmi/id
  BIOS:      NEC U32 11/13/2019
  Vendor:    NEC
  Product:   Express5800/R120h-1M
  Serial:    JPN0084094

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x HPE P03050-091 16 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Compiler Version Notes (Continued)

19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 523.xalanbmk\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 523.xalanbmk\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

### Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

548.exchange2\_r: basepeak = yes



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_int\_base = 282

Express5800/R120h-1M (Intel Xeon Platinum 8260)

SPECrate®2017\_int\_peak = 294

**CPU2017 License:** 9006

**Test Date:** May-2020

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Dec-2019

**Tested by:** NEC Corporation

**Software Availability:** Sep-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-19 19:43:00-0400.

Report generated on 2020-06-09 16:06:07 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.