



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro


SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2020  
Hardware Availability: Sep-2020  
Software Availability: Apr-2020

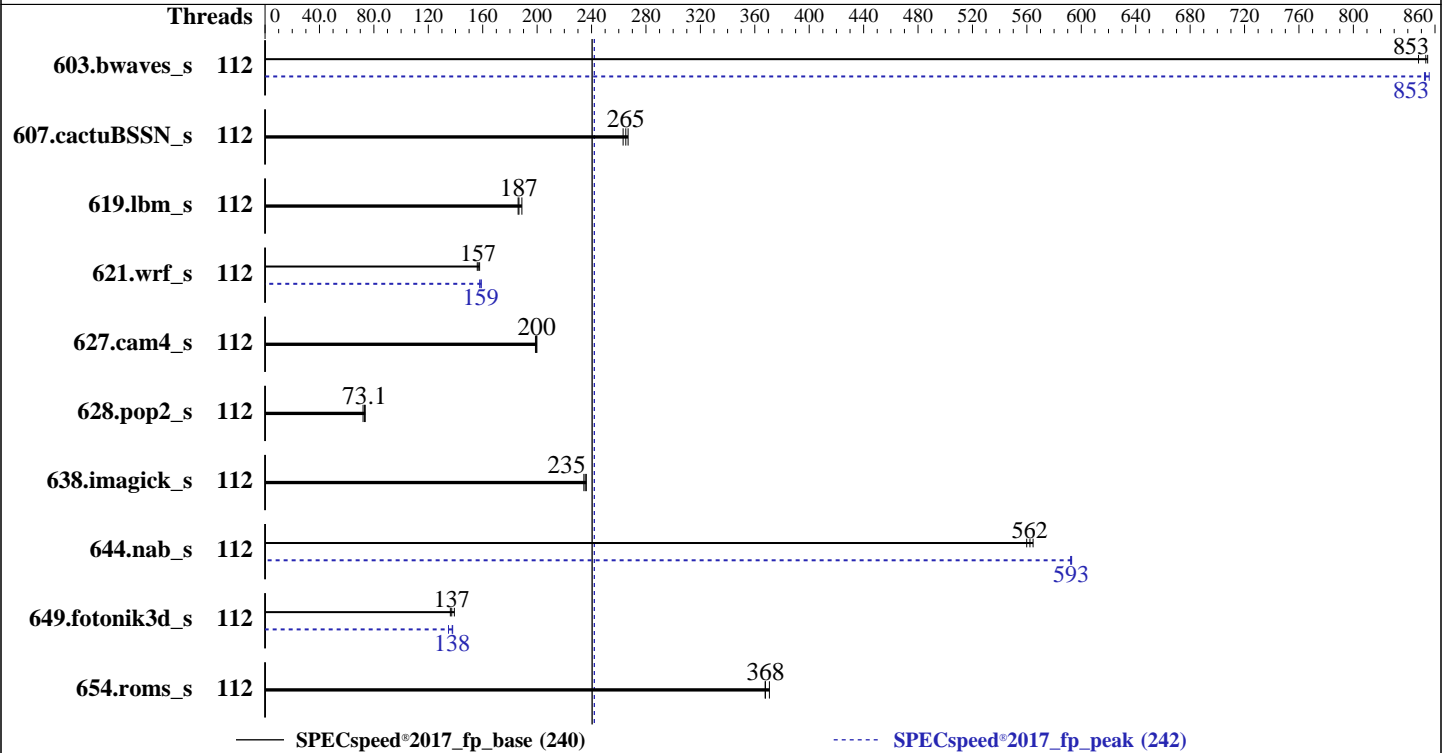

### Hardware

CPU Name: Intel Xeon Platinum 8380HL  
Max MHz: 4300  
Nominal: 2900  
Enabled: 112 cores, 4 chips  
Orderable: 1,2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 3 TB (48 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.2  
Kernel 4.18.0-193.el8.x86\_64  
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Version 1.0 released Sep-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2020  
Hardware Availability: Sep-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	69.0	855	69.6	848	<b>69.1</b>	<b>853</b>	112	68.9	856	69.2	852	<b>69.2</b>	<b>853</b>
607.cactuBSSN_s	112	63.3	263	<b>62.9</b>	<b>265</b>	62.5	267	112	63.3	263	<b>62.9</b>	<b>265</b>	62.5	267
619.lbm_s	112	<b>28.1</b>	<b>187</b>	27.7	189	28.2	186	112	<b>28.1</b>	<b>187</b>	27.7	189	28.2	186
621.wrf_s	112	<b>84.4</b>	<b>157</b>	84.8	156	83.9	158	112	83.2	159	<b>83.4</b>	<b>159</b>	83.8	158
627.cam4_s	112	44.6	199	44.4	200	<b>44.4</b>	<b>200</b>	112	44.6	199	44.4	200	<b>44.4</b>	<b>200</b>
628.pop2_s	112	161	73.6	165	72.0	<b>162</b>	<b>73.1</b>	112	161	73.6	165	72.0	<b>162</b>	<b>73.1</b>
638.imagick_s	112	61.1	236	61.6	234	<b>61.3</b>	<b>235</b>	112	61.1	236	61.6	234	<b>61.3</b>	<b>235</b>
644.nab_s	112	31.2	560	<b>31.1</b>	<b>562</b>	30.9	565	112	29.5	592	29.5	593	<b>29.5</b>	<b>593</b>
649.fotonik3d_s	112	66.9	136	<b>66.4</b>	<b>137</b>	65.5	139	112	66.1	138	<b>66.3</b>	<b>138</b>	67.6	135
654.roms_s	112	42.8	368	<b>42.8</b>	<b>368</b>	42.5	371	112	42.8	368	<b>42.8</b>	<b>368</b>	42.5	371

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

### BIOS Settings:

Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance  
Hyper-Threading = Disable  
Stale AtoS = Disable  
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on X12QCH-01 Tue Oct 13 05:40:44 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
 4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

### From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 112  
On-line CPU(s) list: 0-111  
Thread(s) per core: 1  
Core(s) per socket: 28

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
Stepping: 11
CPU MHz: 2191.649
CPU max MHz: 4300.0000
CPU min MHz: 1000.0000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 772677 MB
node 0 free: 772315 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 774109 MB
node 1 free: 773814 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```

81 82 83
node 2 size: 774137 MB
node 2 free: 765467 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 774136 MB
node 3 free: 773811 MB
node distances:
node  0  1  2  3
  0:  10  20  20  20
  1:  20  10  20  20
  2:  20  20  10  20
  3:  20  20  20  10

```

```

From /proc/meminfo
MemTotal:          3169342504 kB
HugePages_Total:    0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

```

uname -a:
Linux X12QCH-01 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:                               Not affected
CVE-2018-3620 (L1 Terminal Fault):           Not affected
Microarchitectural Data Sampling:           Not affected
CVE-2017-5754 (Meltdown):                    Not affected
CVE-2018-3639 (Speculative Store Bypass):    Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):           Mitigation: usercopy/swapgs barriers and __user
pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
tsx\_async\_abort: Not affected

run-level 3 Oct 13 01:56

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	125G	17G	108G	14%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends International, LLC. 1.0 09/02/2020  
Vendor: Supermicro  
Product: Super Server  
Product Family: Family  
Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
48x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

### Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort

### Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

## Base Portability Flags (Continued)

```
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2020  
Hardware Availability: Sep-2020  
Software Availability: Apr-2020

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC\_SUPPRESS\_OPENMP -DSPEC\_OPENMP -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-240P-TNRT  
(X12QCH+ , Intel Xeon Platinum 8380HL)

SPECspeed®2017\_fp\_base = 240

SPECspeed®2017\_fp\_peak = 242

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2020  
**Hardware Availability:** Sep-2020  
**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-12 17:40:43-0400.  
Report generated on 2020-10-27 16:15:18 by CPU2017 PDF formatter v6255.  
Originally published on 2020-10-27.