



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

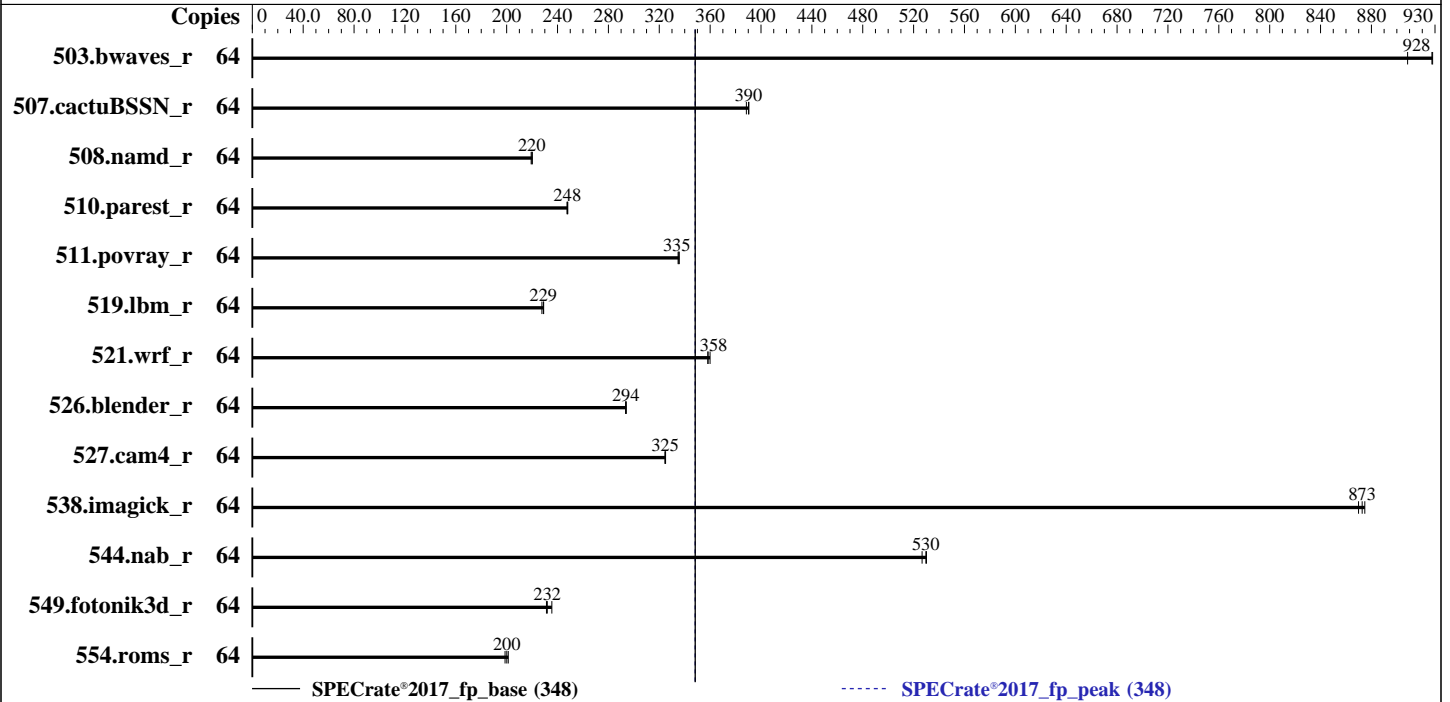

### Hardware

CPU Name: Intel Xeon Platinum 8356H  
 Max MHz: 4400  
 Nominal: 3900  
 Enabled: 32 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200V-R, running at 2933)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 4.10.03 released Jan-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	691	928	706	908	<b>692</b>	<b>928</b>	64	691	928	706	908	<b>692</b>	<b>928</b>
507.cactuBSSN_r	64	<b>208</b>	<b>390</b>	209	388	207	390	64	<b>208</b>	<b>390</b>	209	388	207	390
508.namd_r	64	277	219	<b>277</b>	<b>220</b>	276	220	64	277	219	<b>277</b>	<b>220</b>	276	220
510.parest_r	64	677	247	<b>676</b>	<b>248</b>	675	248	64	677	247	<b>676</b>	<b>248</b>	675	248
511.povray_r	64	446	335	<b>446</b>	<b>335</b>	445	336	64	446	335	<b>446</b>	<b>335</b>	445	336
519.lbm_r	64	296	228	294	229	<b>295</b>	<b>229</b>	64	296	228	294	229	<b>295</b>	<b>229</b>
521.wrf_r	64	398	360	400	358	<b>400</b>	<b>358</b>	64	398	360	400	358	<b>400</b>	<b>358</b>
526.blender_r	64	331	294	<b>332</b>	<b>294</b>	332	294	64	331	294	<b>332</b>	<b>294</b>	332	294
527.cam4_r	64	345	325	<b>345</b>	<b>325</b>	344	325	64	345	325	<b>345</b>	<b>325</b>	344	325
538.imagick_r	64	<b>182</b>	<b>873</b>	182	875	183	870	64	<b>182</b>	<b>873</b>	182	875	183	870
544.nab_r	64	203	530	205	527	<b>203</b>	<b>530</b>	64	203	530	205	527	<b>203</b>	<b>530</b>
549.fotonik3d_r	64	1078	231	<b>1075</b>	<b>232</b>	1059	236	64	1078	231	<b>1075</b>	<b>232</b>	1059	236
554.roms_r	64	505	201	<b>508</b>	<b>200</b>	512	199	64	505	201	<b>508</b>	<b>200</b>	512	199

SPECrate®2017\_fp\_base = **348**

SPECrate®2017\_fp\_peak = **348**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
SCALING\_GOVERNOR set to Performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
CLE Support set to Disable  
Sub NUMA Cluster (SNC) set to Enable  
Intel Hyper Threading Technology set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Fri Apr 9 11:33:01 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
 4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 2 3 5 6 10 17 19 28
physical 1: cores 2 3 6 13 18 24 28 29
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

### Platform Notes (Continued)

physical 2: cores 2 10 13 17 18 19 28 29  
physical 3: cores 2 6 10 17 18 19 28 29

From lspcu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
Stepping:               11
CPU MHz:                4300.027
CPU max MHz:            4400.0000
CPU min MHz:            1200.0000
BogoMIPS:               7800.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0,1,4,5,32,33,36,37
NUMA node1 CPU(s):     2,3,6,7,34,35,38,39
NUMA node2 CPU(s):     8,9,12,13,40,41,44,45
NUMA node3 CPU(s):     10,11,14,15,42,43,46,47
NUMA node4 CPU(s):     16,17,19,20,48,49,51,52
NUMA node5 CPU(s):     18,21-23,50,53-55
NUMA node6 CPU(s):     24,26-28,56,58-60
NUMA node7 CPU(s):     25,29-31,57,61-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

### Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 4 5 32 33 36 37
node 0 size: 192070 MB
node 0 free: 186244 MB
node 1 cpus: 2 3 6 7 34 35 38 39
node 1 size: 193506 MB
node 1 free: 190001 MB
node 2 cpus: 8 9 12 13 40 41 44 45
node 2 size: 193533 MB
node 2 free: 190055 MB
node 3 cpus: 10 11 14 15 42 43 46 47
node 3 size: 193533 MB
node 3 free: 190051 MB
node 4 cpus: 16 17 19 20 48 49 51 52
node 4 size: 193533 MB
node 4 free: 190052 MB
node 5 cpus: 18 21 22 23 50 53 54 55
node 5 size: 193533 MB
node 5 free: 190050 MB
node 6 cpus: 24 26 27 28 56 58 59 60
node 6 size: 193533 MB
node 6 free: 190032 MB
node 7 cpus: 25 29 30 31 57 61 62 63
node 7 size: 193533 MB
node 7 free: 189938 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 20 20 20 20 20 20
1:  11 10 20 20 20 20 20 20
2:  20 20 10 11 20 20 20 20
3:  20 20 11 10 20 20 20 20
4:  20 20 20 20 10 11 20 20
5:  20 20 20 20 11 10 20 20
6:  20 20 20 20 20 20 10 11
7:  20 20 20 20 20 20 11 10
```

```
From /proc/meminfo
MemTotal: 1583901868 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Apr-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Jan-2021

### Platform Notes (Continued)

/sbin/tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.2"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86\_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 9 05:44

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	115G	277G	30%	/home

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

### Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: Inspur  
Product: NF8260M6  
Product Family: Family  
Serial: 380152314

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 04.10.03  
BIOS Date: 01/20/2021  
BIOS Revision: 5.19

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Apr-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Jan-2021

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
 C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
 -----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
 C++, C | 511.povray\_r(peak)  
 -----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
 C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
 -----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
 C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
 -----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Apr-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Jan-2021

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
 Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
 Fortran, C | 521.wrf\_r(peak)  
 -----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
 Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
 -----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
 Fortran, C | 521.wrf\_r(peak)  
 -----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
521.wrf_r: ifort icc
```

```
527.cam4_r: ifort icx
```

Benchmarks using both C and C++:

```
511.povray_r: icpc icc
```

```
526.blender_r: icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Peak Optimization Flags (Continued)

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 348

Inspur NF8260M6 (Intel Xeon Platinum 8356H)

SPECrate®2017\_fp\_peak = 348

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Apr-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Jan-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-09 11:33:01-0400.

Report generated on 2021-04-27 16:26:14 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-27.