



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

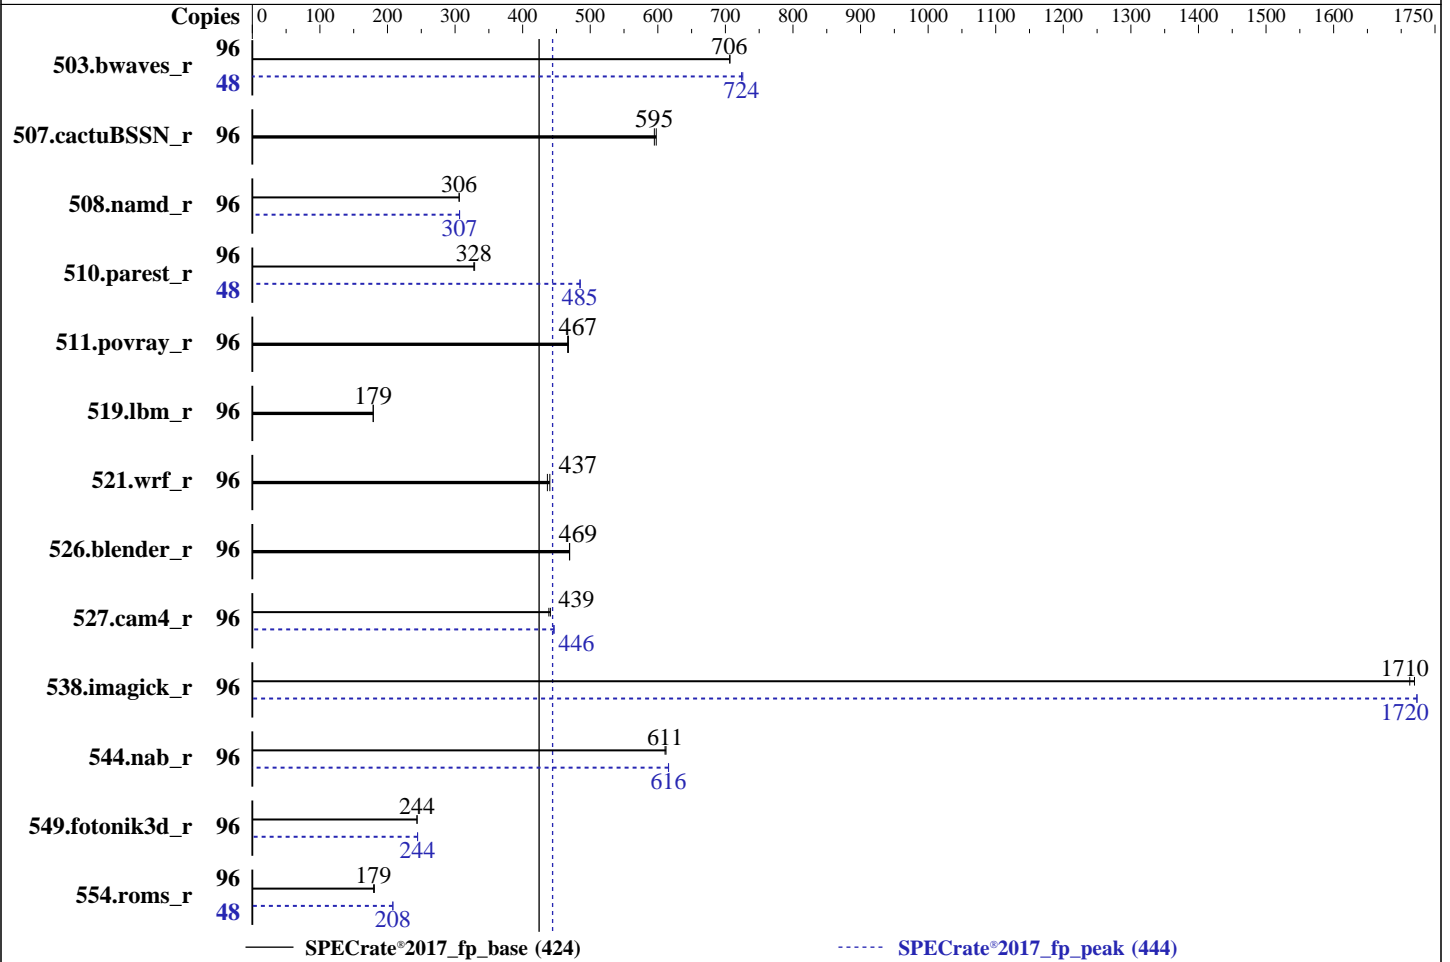

### Hardware

CPU Name: AMD EPYC 7443  
 Max MHz: 4000  
 Nominal: 2850  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 225 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.10.1.el8\_3.x86\_64  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 2.0.3 released Jan-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Date: Mar-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<u>1363</u>	<u>706</u>	1362	707			48	<u>665</u>	<u>724</u>	663	726		
507.cactuBSSN_r	96	203	598	<u>204</u>	<u>595</u>			96	203	598	<u>204</u>	<u>595</u>		
508.namd_r	96	<u>298</u>	<u>306</u>	298	306			96	297	307	<u>297</u>	<u>307</u>		
510.parest_r	96	<u>766</u>	<u>328</u>	763	329			48	259	485	<u>259</u>	<u>485</u>		
511.povray_r	96	479	468	<u>480</u>	<u>467</u>			96	479	468	<u>480</u>	<u>467</u>		
519.lbm_r	96	<u>566</u>	<u>179</u>	566	179			96	<u>566</u>	<u>179</u>	566	179		
521.wrf_r	96	489	440	<u>493</u>	<u>437</u>			96	489	440	<u>493</u>	<u>437</u>		
526.blender_r	96	<u>312</u>	<u>469</u>	311	470			96	<u>312</u>	<u>469</u>	311	470		
527.cam4_r	96	<u>383</u>	<u>439</u>	381	441			96	<u>377</u>	<u>446</u>	376	447		
538.imagick_r	96	139	1720	<u>139</u>	<u>1710</u>			96	139	1720	<u>139</u>	<u>1720</u>		
544.nab_r	96	<u>265</u>	<u>611</u>	264	612			96	<u>262</u>	<u>616</u>	262	616		
549.fotonik3d_r	96	<u>1535</u>	<u>244</u>	1535	244			96	<u>1530</u>	<u>244</u>	1530	245		
554.roms_r	96	<u>850</u>	<u>179</u>	845	181			48	367	208	<u>367</u>	<u>208</u>		

SPECrate®2017\_fp\_base = 424

SPECrate®2017\_fp\_peak = 444

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
  
'echo 8 > /proc/sys/vm/dirty\_ratio' run as root to limit dirty cache to 8% of memory.  
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.  
'echo 1 > /proc/sys/vm/zone\_reclaim\_mode' run as root to free node-local memory

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

and avoid remote memory usage.

'sync; echo 3 > /proc/sys/vm/drop\_caches' run as root to reset filesystem caches.

'sysctl -w kernel.randomize\_va\_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and

'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).

'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root for base integer runs to enable THP only on request.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.5/amd\_rate\_aocc300\_milan\_A\_lib/64;/mnt/ramdisk/cpu2017-1.1.5/amd\_rate\_aocc300\_milan\_A\_lib/32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

NUMA Nodes per Socket : 4

L3 Cache as NUMA Domain : Enabled

Virtualization Technology : Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

DRAM Refresh Delay : Performance  
 System Profile : Custom  
 CPU Power Management : Maximum Performance  
 Memory Patrol Scrub : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.5/bin/sysinfo  
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
 running on localhost.localdomain Sat Mar 27 22:05:06 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7443 24-Core Processor  
 2 "physical id"s (chips)  
 96 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 24  
 siblings : 48  
 physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
 physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 CPU(s): 96  
 On-line CPU(s) list: 0-95  
 Thread(s) per core: 2  
 Core(s) per socket: 24  
 Socket(s): 2  
 NUMA node(s): 8  
 Vendor ID: AuthenticAMD  
 CPU family: 25  
 Model: 1  
 Model name: AMD EPYC 7443 24-Core Processor  
 Stepping: 1  
 CPU MHz: 1996.323  
 BogoMIPS: 5689.16  
 Virtualization: AMD-V  
 L1d cache: 32K  
 L1i cache: 32K  
 L2 cache: 512K

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

L3 cache: 32768K
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 257495 MB
node 0 free: 257395 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 257915 MB
node 1 free: 257806 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 257892 MB
node 2 free: 257806 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 257915 MB
node 3 free: 257625 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 257907 MB
node 4 free: 252985 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 257889 MB
node 5 free: 257919 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

node 6 size: 257931 MB
node 6 free: 257921 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 257900 MB
node 7 free: 257915 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      2113396252 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.10.1.el8_3.x86_64 #1 SMP Wed Dec 16 03:30:52
EST 2020 x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected  
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: always-on, RSB filling  
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected  
 CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Mar 27 12:54 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5  

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	225G	4.8G	221G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id  
 Vendor: Dell Inc.  
 Product: PowerEdge R7525  
 Product Family: PowerEdge  
 Serial: 48LN333

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
 16x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200  
 16x Not Specified Not Specified

BIOS:  
 BIOS Vendor: Dell Inc.  
 BIOS Version: 2.0.3  
 BIOS Date: 01/15/2021  
 BIOS Revision: 2.0

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

```
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

```

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

538.imagick\_r (continued):

```
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 424

PowerEdge R7525 (AMD EPYC 7443 24-Core Processor)

SPECrate®2017\_fp\_peak = 444

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-03-27 23:05:06-0400.

Report generated on 2021-05-25 16:56:56 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-25.