



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu


PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

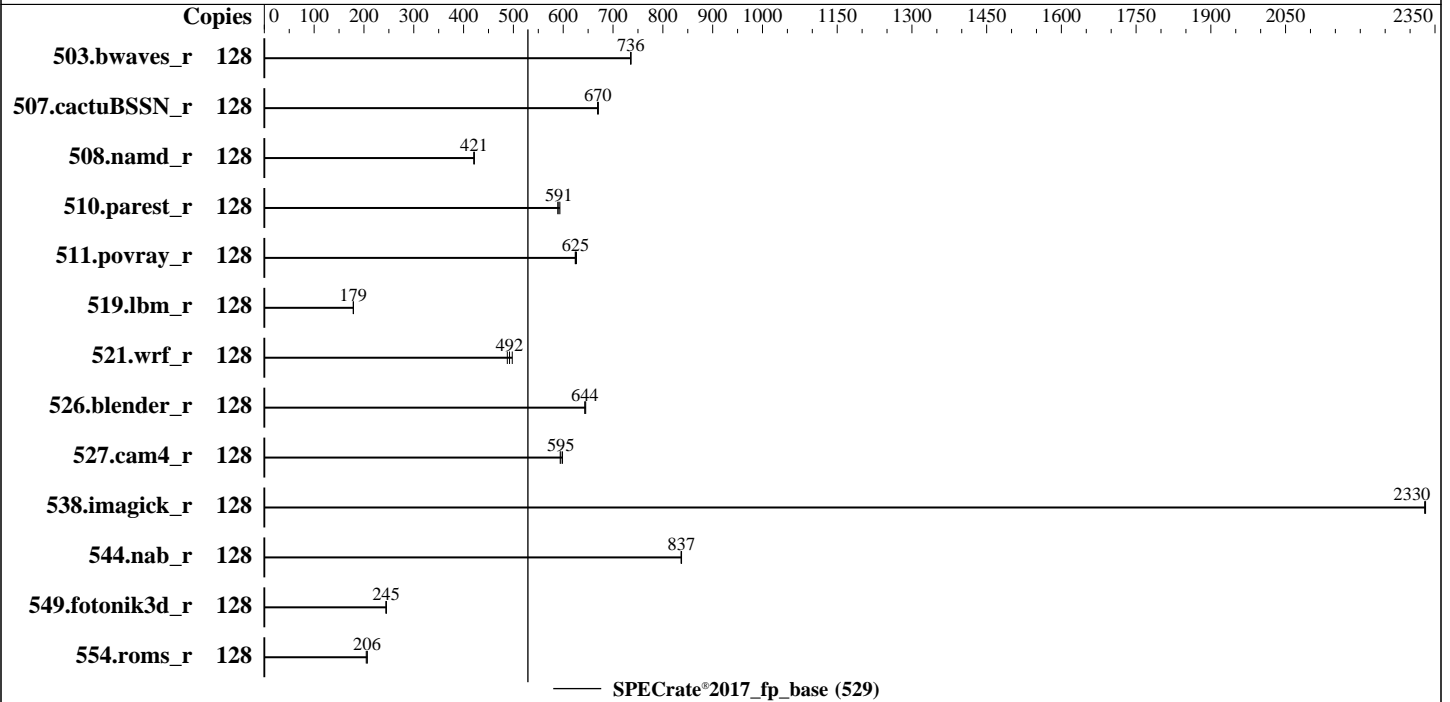

Hardware

CPU Name: AMD EPYC 75F3
 Max MHz: 4000
 Nominal: 2950
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200V-L)
 Storage: 1 x PCIe SSD, 2TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 kernel version 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Fujitsu BIOS Version 2.1.V2 Released Oct-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>1745</u>	<u>736</u>	1746	735	1744	736							
507.cactuBSSN_r	128	<u>242</u>	<u>670</u>	242	669	242	670							
508.namd_r	128	288	422	289	421	<u>289</u>	<u>421</u>							
510.parest_r	128	564	593	<u>566</u>	<u>591</u>	568	589							
511.povray_r	128	479	624	<u>479</u>	<u>625</u>	477	627							
519.lbm_r	128	755	179	755	179	<u>755</u>	<u>179</u>							
521.wrf_r	128	576	498	<u>583</u>	<u>492</u>	588	488							
526.blender_r	128	<u>303</u>	<u>644</u>	302	645	303	643							
527.cam4_r	128	374	599	<u>376</u>	<u>595</u>	377	594							
538.imagick_r	128	<u>137</u>	<u>2330</u>	137	2330	137	2330							
544.nab_r	128	<u>257</u>	<u>837</u>	257	837	257	838							
549.fotonik3d_r	128	2036	245	2043	244	<u>2038</u>	<u>245</u>							
554.roms_r	128	<u>986</u>	<u>206</u>	985	207	994	205							

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/benchmark/speccpu-milan/amd_rate_aocc300_milan_B_lib/lib;/home/benchmark/speccpu-milan/amd_rate_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS configuration:
ACPI SRAT L3 Cache As NUMA Domain = Enabled
APBDIS = 1
cTDP Control = Manual
cTDP = 280
Determinism Slider = Power
DRAM Scrub Time = Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2021

Hardware Availability: Oct-2021

Software Availability: Mar-2021

Platform Notes (Continued)

EDC Control = Manual
 EDC = 300
 EDC Platform Limit = 300
 Fix SOC P-state = P0
 IOMMU = Disabled
 L1 Stream HW Prefetcher = Enabled
 L2 Stream HW Prefetcher = Enabled
 NUMA Nodes Per Socket = NPS4
 Package Power Limit = 280
 Package Power Limit Control = Manual
 SVM Mode = Disabled
 SMT Control = Enabled
 xGMI Link Max Speed = 18Gbps

Sysinfo program /home/benchmark/speccpu-milan/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Wed Aug 4 02:41:11 2021

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 75F3 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

```
From lscpu from util-linux 2.33.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

CPU family:      25
Model:          1
Model name:     AMD EPYC 75F3 32-Core Processor
Stepping:      1
CPU MHz:       3169.267
CPU max MHz:   2950.0000
CPU min MHz:   1500.0000
BogoMIPS:      5899.90
Virtualization: AMD-V
L1d cache:     32K
L1i cache:     32K
L2 cache:     512K
L3 cache:     32768K
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127

```

```

Flags:          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 128753 MB
node 0 free: 128479 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 129019 MB
node 1 free: 128774 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 129021 MB
node 2 free: 128749 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 129019 MB
node 3 free: 128727 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 129021 MB
node 4 free: 128632 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 129019 MB
node 5 free: 128764 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 129021 MB
node 6 free: 128769 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 129007 MB
node 7 free: 128690 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 129021 MB
node 8 free: 128770 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 129019 MB
node 9 free: 128783 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 129021 MB
node 10 free: 128786 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 129019 MB
node 11 free: 128784 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 129021 MB
node 12 free: 128779 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 129019 MB
node 13 free: 128785 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 128988 MB
node 14 free: 128754 MB
node 15 cpus: 60 61 62 63 124 125 126 127

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Platform Notes (Continued)

node 15 size: 128779 MB
node 15 free: 128542 MB
node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

```
From /proc/meminfo
MemTotal:      2113309080 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020
(720aeba/lp-1a956f1) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit): Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 3 23:50

```
SPEC is set to: /home/benchmark/speccpu-milan
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   1.3T  46G  1.3T   4% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX2450 M1
Serial:          MACUxxxxxxx
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 32x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
```

```
BIOS:
 BIOS Vendor:      American Megatrends Inc.
 BIOS Version:     2.1.V2
 BIOS Date:        08/02/2021
 BIOS Revision:    5.22
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2021

Hardware Availability: Oct-2021

Software Availability: Mar-2021

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

```

C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2021

Hardware Availability: Oct-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M1, AMD EPYC 75F3
2.95 GHz

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2021
Hardware Availability: Oct-2021
Software Availability: Mar-2021

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-MILAN-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-MILAN-RevB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-03 13:41:10-0400.
Report generated on 2021-11-24 11:18:37 by CPU2017 PDF formatter v6442.
Originally published on 2021-11-23.