



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jun-2021

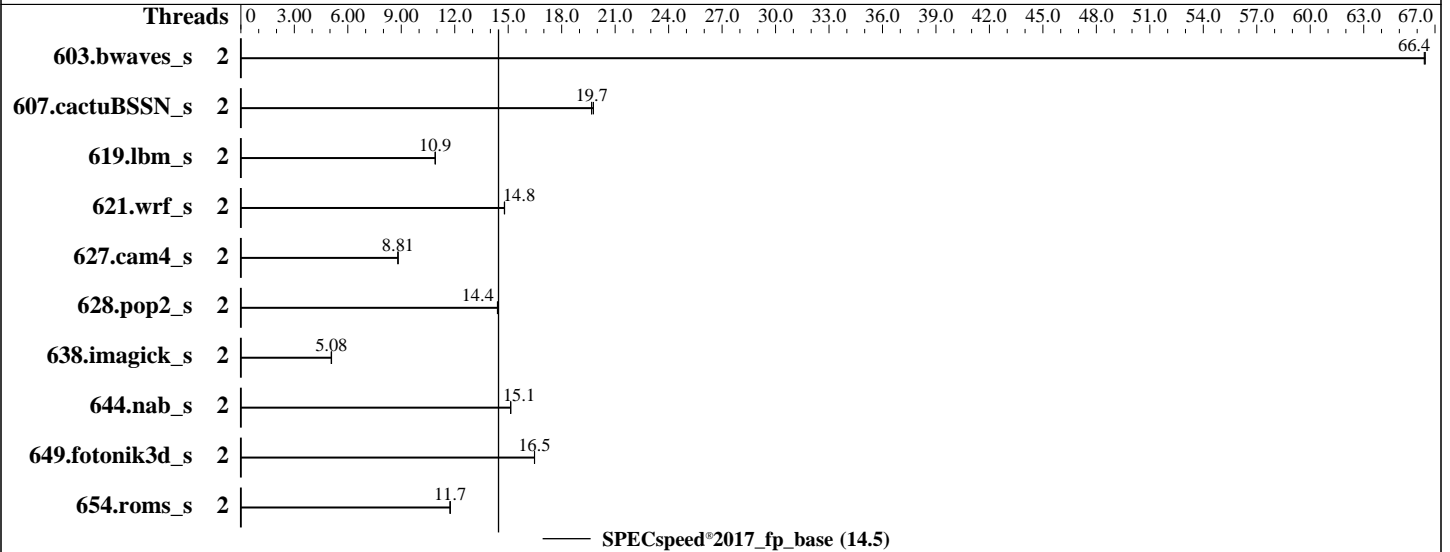

### Hardware

CPU Name: Intel Pentium Gold G6405  
 Max MHz: 4100  
 Nominal: 4100  
 Enabled: 2 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 4 MB I+D on chip per chip  
 Other: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E, running at 2667)  
 Storage: 1 x SATA M.2 SSD, 240GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default  
 Compiler: Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.22 R1.31.0 for D3931-A1x. Released Mar-2022 tested as V5.0.0.22 R1.20.0 for D3931-A1x Jan-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Jun-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	889	66.4	888	66.5	<b>888</b>	<b>66.4</b>							
607.cactuBSSN_s	2	843	19.8	847	19.7	<b>847</b>	<b>19.7</b>							
619.lbm_s	2	480	10.9	480	10.9	<b>480</b>	<b>10.9</b>							
621.wrf_s	2	<b>894</b>	<b>14.8</b>	895	14.8	894	14.8							
627.cam4_s	2	<b>1005</b>	<b>8.81</b>	1006	8.81	1005	8.82							
628.pop2_s	2	825	14.4	824	14.4	<b>825</b>	<b>14.4</b>							
638.imagick_s	2	2834	5.09	<b>2839</b>	<b>5.08</b>	2846	5.07							
644.nab_s	2	1154	15.1	<b>1154</b>	<b>15.1</b>	1154	15.1							
649.fotonik3d_s	2	553	16.5	<b>553</b>	<b>16.5</b>	553	16.5							
654.roms_s	2	<b>1340</b>	<b>11.7</b>	1342	11.7	1340	11.8							

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jun-2021

### General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

HyperThreading = Disabled  
Package C-State un-demotion = Enabled  
REFRESH\_2X\_MODE = 2- Enabled HOT only  
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Fri Feb 11 10:16:14 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) Gold G6405 CPU @ 4.10GHz
 1 "physical id"s (chips)
 2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 2
siblings : 2
physical 0: cores 0 1
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 39 bits physical, 48 bits virtual
CPU(s): 2
On-line CPU(s) list: 0,1
Thread(s) per core: 1
Core(s) per socket: 2
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 165
Model name: Intel(R) Pentium(R) Gold G6405 CPU @ 4.10GHz
Stepping: 3
CPU MHz: 3879.227
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```

CPU max MHz:          4100.0000
CPU min MHz:          800.0000
BogoMIPS:             8199.79
Virtualization:      VT-x
L1d cache:           64 KiB
L1i cache:           64 KiB
L2 cache:            512 KiB
L3 cache:            4 MiB
NUMA node0 CPU(s):  0,1
Vulnerability Itlb multihit: KVM: Mitigation: VMX disabled
Vulnerability L1tf:   Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear flush_l1d arch_capabilities

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	64K	8	Data	1	64	1	64
L1i	32K	64K	8	Instruction	1	64	1	64
L2	256K	512K	4	Unified	2	1024	1	64
L3	4M	4M	16	Unified	3	4096	1	64

`/proc/cpuinfo` cache data  
cache size : 4096 KB

From `numactl --hardware`

WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0 1  
node 0 size: 31546 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```
node 0 free: 31142 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 32303464 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
(ba3c2e9/lp-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: VMX disabled
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Feb 11 10:15
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

SPEC is set to: /home/Benchmark/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	180G	44G	137G	24%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY TX1330 M5
Product Family: SERVER
Serial:          EWBUXXXXXXX

```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200, configured at 2667

```

BIOS:
  BIOS Vendor:      FUJITSU // American Megatrends International, LLC.
  BIOS Version:     V5.0.0.22 R1.20.0 for D3931-Alx
  BIOS Date:        01/11/2022
  BIOS Revision:    1.20

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----

```

```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----

```

```

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Jun-2021

### Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

### Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M5, Intel Pentium Gold G6405,  
4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jun-2021

## Base Portability Flags (Continued)

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevD.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevD.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M5, Intel Pentium Gold G6405,  
4.10GHz

SPECspeed®2017\_fp\_base = 14.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jun-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-10 20:16:14-0500.  
Report generated on 2022-03-16 13:58:55 by CPU2017 PDF formatter v6442.  
Originally published on 2022-03-16.