



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

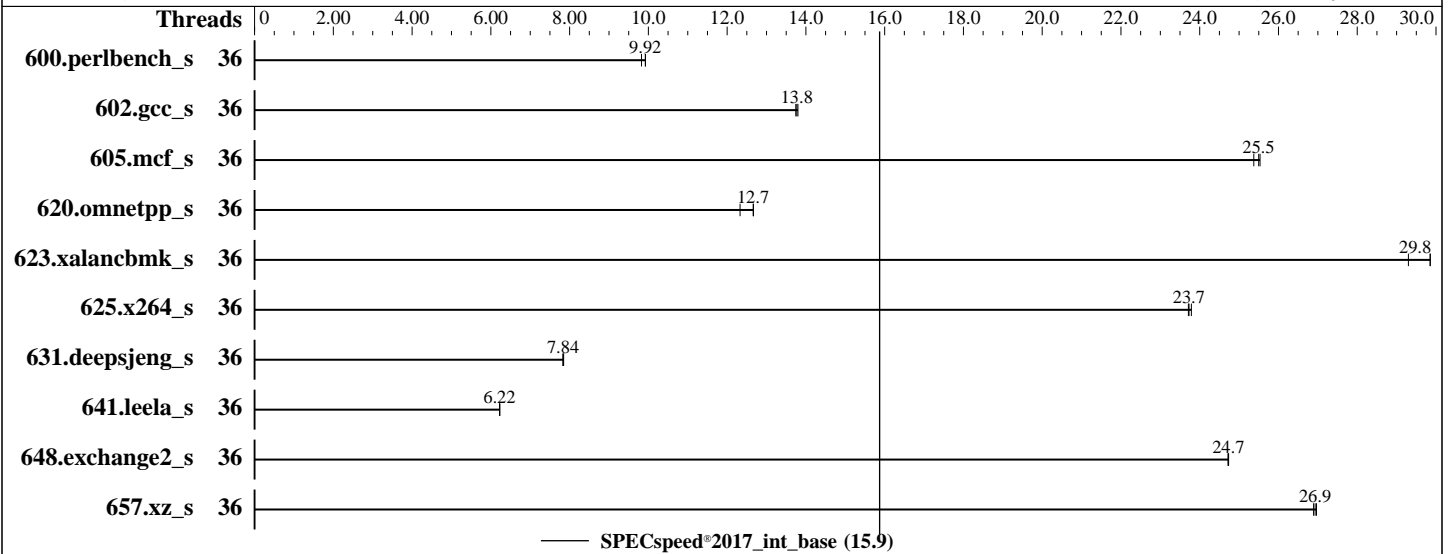

Hardware

CPU Name: Intel Xeon Gold 6416H
Max MHz: 4200
Nominal: 2200
Enabled: 36 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 45 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 1920 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 2.00.35 Released Nov-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: OS set to prefer performance at the cost of
additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	36	179	9.93	<u>179</u>	<u>9.92</u>	181	9.83									
602.gcc_s	36	289	13.8	<u>289</u>	<u>13.8</u>	290	13.7									
605.mcf_s	36	<u>185</u>	<u>25.5</u>	186	25.4	185	25.5									
620.omnetpp_s	36	132	12.3	129	12.7	<u>129</u>	<u>12.7</u>									
623.xalancbmk_s	36	48.4	29.3	47.5	29.9	<u>47.5</u>	<u>29.8</u>									
625.x264_s	36	74.2	23.8	<u>74.3</u>	<u>23.7</u>	74.4	23.7									
631.deepsjeng_s	36	183	7.83	<u>183</u>	<u>7.84</u>	183	7.85									
641.leela_s	36	<u>274</u>	<u>6.22</u>	274	6.22	274	6.23									
648.exchange2_s	36	119	24.7	<u>119</u>	<u>24.7</u>	119	24.7									
657.xz_s	36	230	26.9	229	27.0	<u>230</u>	<u>26.9</u>									

SPECspeed®2017_int_base = 15.9

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Dec 6 02:37:52 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6416H
2 "physical id"s (chips)
36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 18
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 36
On-line CPU(s) list: 0-35
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6416H
BIOS Model name: Intel(R) Xeon(R) Gold 6416H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 18
Socket(s): 2
Stepping: 7
Frequency boost: enabled
CPU max MHz: 2201.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Platform Notes (Continued)

```
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 sse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
```

```
Virtualization: VT-x
L1d cache: 1.7 MiB (36 instances)
L1i cache: 1.1 MiB (36 instances)
L2 cache: 72 MiB (36 instances)
L3 cache: 90 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-17
NUMA node1 CPU(s): 18-35
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.7M	12	Data	1	64	1	64
L1i	32K	1.1M	8	Instruction	1	64	1	64
L2	2M	72M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

```
/proc/cpuinfo cache data
cache size : 46080 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 257105 MB
node 0 free: 256593 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 257996 MB
node 1 free: 255377 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

From /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Platform Notes (Continued)

MemTotal: 527465148 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="9.0 (Plow)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="9.0"
  PLATFORM_ID="platform:el9"
  PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos
```

```
uname -a:
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 3 Dec 5 17:46

```
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  7.9G 364G   3% /home
```

```
From /sys/devices/virtual/dmi/id
Product: 2288H V7
Product Family: Eagle Stream
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:
BIOS Vendor:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Platform Notes (Continued)

BIOS Version: 2.00.35
BIOS Date: 11/30/2022
BIOS Revision: 0.35

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 15.9

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Base Portability Flags (Continued)

631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-05 13:37:51-0500.
Report generated on 2024-01-29 17:15:34 by CPU2017 PDF formatter v6716.
Originally published on 2023-01-10.