



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

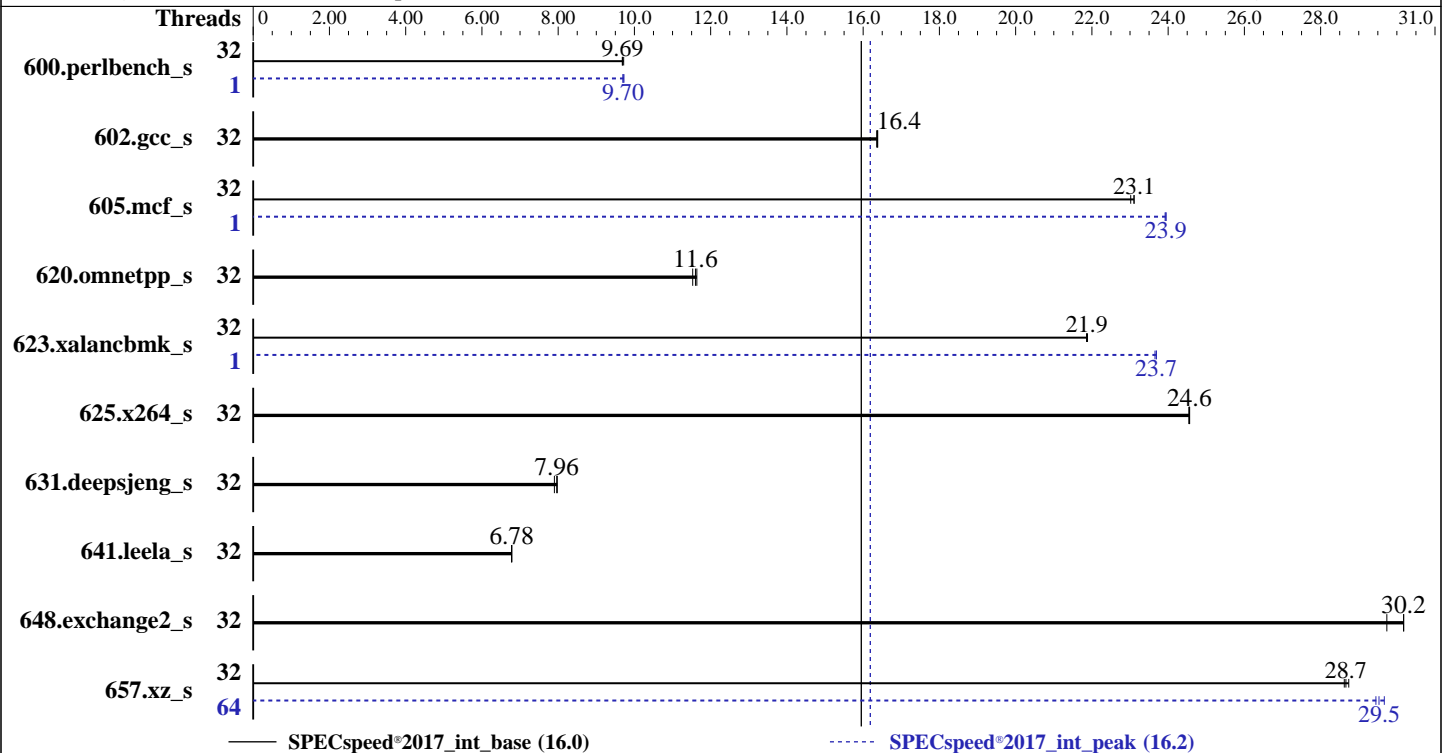

### Hardware

CPU Name: AMD EPYC 9374F  
 Max MHz: 4300  
 Nominal: 3850  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1.6 TB PCIe NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 0901 released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	183	9.72	<b><u>183</u></b>	<b><u>9.69</u></b>	183	9.68	1	183	9.70	183	9.73	<b><u>183</u></b>	<b><u>9.70</u></b>
602.gcc_s	32	243	16.4	243	16.4	<b><u>243</u></b>	<b><u>16.4</u></b>	32	243	16.4	243	16.4	<b><u>243</u></b>	<b><u>16.4</u></b>
605.mcf_s	32	<b><u>204</u></b>	<b><u>23.1</u></b>	204	23.1	205	23.0	1	<b><u>197</u></b>	<b><u>23.9</u></b>	197	23.9	197	23.9
620.omnetpp_s	32	141	11.5	<b><u>141</u></b>	<b><u>11.6</u></b>	140	11.6	32	141	11.5	<b><u>141</u></b>	<b><u>11.6</u></b>	140	11.6
623.xalancbmk_s	32	64.7	21.9	64.8	21.9	<b><u>64.8</u></b>	<b><u>21.9</u></b>	1	59.9	23.7	<b><u>59.8</u></b>	<b><u>23.7</u></b>	59.8	23.7
625.x264_s	32	71.9	24.5	<b><u>71.8</u></b>	<b><u>24.6</u></b>	71.8	24.6	32	71.9	24.5	<b><u>71.8</u></b>	<b><u>24.6</u></b>	71.8	24.6
631.deepsjeng_s	32	181	7.90	<b><u>180</u></b>	<b><u>7.96</u></b>	180	7.98	32	181	7.90	<b><u>180</u></b>	<b><u>7.96</u></b>	180	7.98
641.leela_s	32	252	6.78	<b><u>252</u></b>	<b><u>6.78</u></b>	252	6.78	32	252	6.78	<b><u>252</u></b>	<b><u>6.78</u></b>	252	6.78
648.exchange2_s	32	<b><u>97.4</u></b>	<b><u>30.2</u></b>	97.4	30.2	98.9	29.7	32	<b><u>97.4</u></b>	<b><u>30.2</u></b>	97.4	30.2	98.9	29.7
657.xz_s	32	216	28.6	215	28.7	<b><u>216</u></b>	<b><u>28.7</u></b>	64	208	29.7	210	29.4	<b><u>209</u></b>	<b><u>29.5</u></b>

SPECspeed®2017\_int\_base = **16.0**

SPECspeed®2017\_int\_peak = **16.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/cpull9/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

```
SR-IOV Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS2
Determinism Control = Manual
Determinism Enable = Power
Engine Boost = Aggressive
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
IOMMU = Disabled
BMC Configuration:
Fan mode = Full speed mode
```

```
Sysinfo program /cpull9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jul 11 04:19:56 2023
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
04:19:56 up 11:54, 1 user, load average: 3.58, 4.90, 3.18
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1      -              16:31   11:48m  1.00s  0.12s /bin/bash ./amd_speed_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094613
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094613
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speed.sh
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.408/temlogs/preenv.intspeed.408.0.log --lognum 408.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpull9

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9374F 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101116
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores       : 32
siblings        : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             64
On-line CPU(s) list: 0-63
Vendor ID:          AuthenticAMD
Model name:         AMD EPYC 9374F 32-Core Processor
CPU family:         25
Model:              17
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s):          1
Stepping:           1
Frequency boost:    enabled
CPU max MHz:        4304.9312
CPU min MHz:        1500.0000
BogoMIPS:           7688.33
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

### Platform Notes (Continued)

```

clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V

```

Virtualization:

```

L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 386793 MB
node 0 free: 385543 MB
node 1 cpus: 16-31,48-63
node 1 size: 386884 MB
node 1 free: 386290 MB
node distances:
node 0 1
0: 10 12
1: 12 10

```

9. /proc/meminfo

MemTotal: 792246288 kB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

### Platform Notes (Continued)

10. who -r  
run-level 3 Jul 10 16:26

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged  
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections  
postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4  
wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load  
lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind  
rpmconfigcheck rsyncd serial-getty@ smartd-generate\_opts snmpd snmptrapd svnserv  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd tuned udisks2  
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803  
splash=silent  
mitigations=auto  
quiet

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 3.85 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness               1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode       1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /cpull9
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 229G 272G 46% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS520A-E12-RS12U
Product Family: Server
Serial:      123456789012

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

BIOS Version: 0901  
BIOS Date: 05/04/2023  
BIOS Revision: 9.1

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Base Portability Flags (Continued)

```
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

602.gcc\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: basepeak = yes

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(3.85 GHz, AMD EPYC 9374F)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-10 16:19:56-0400.

Report generated on 2023-08-02 16:30:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.