



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

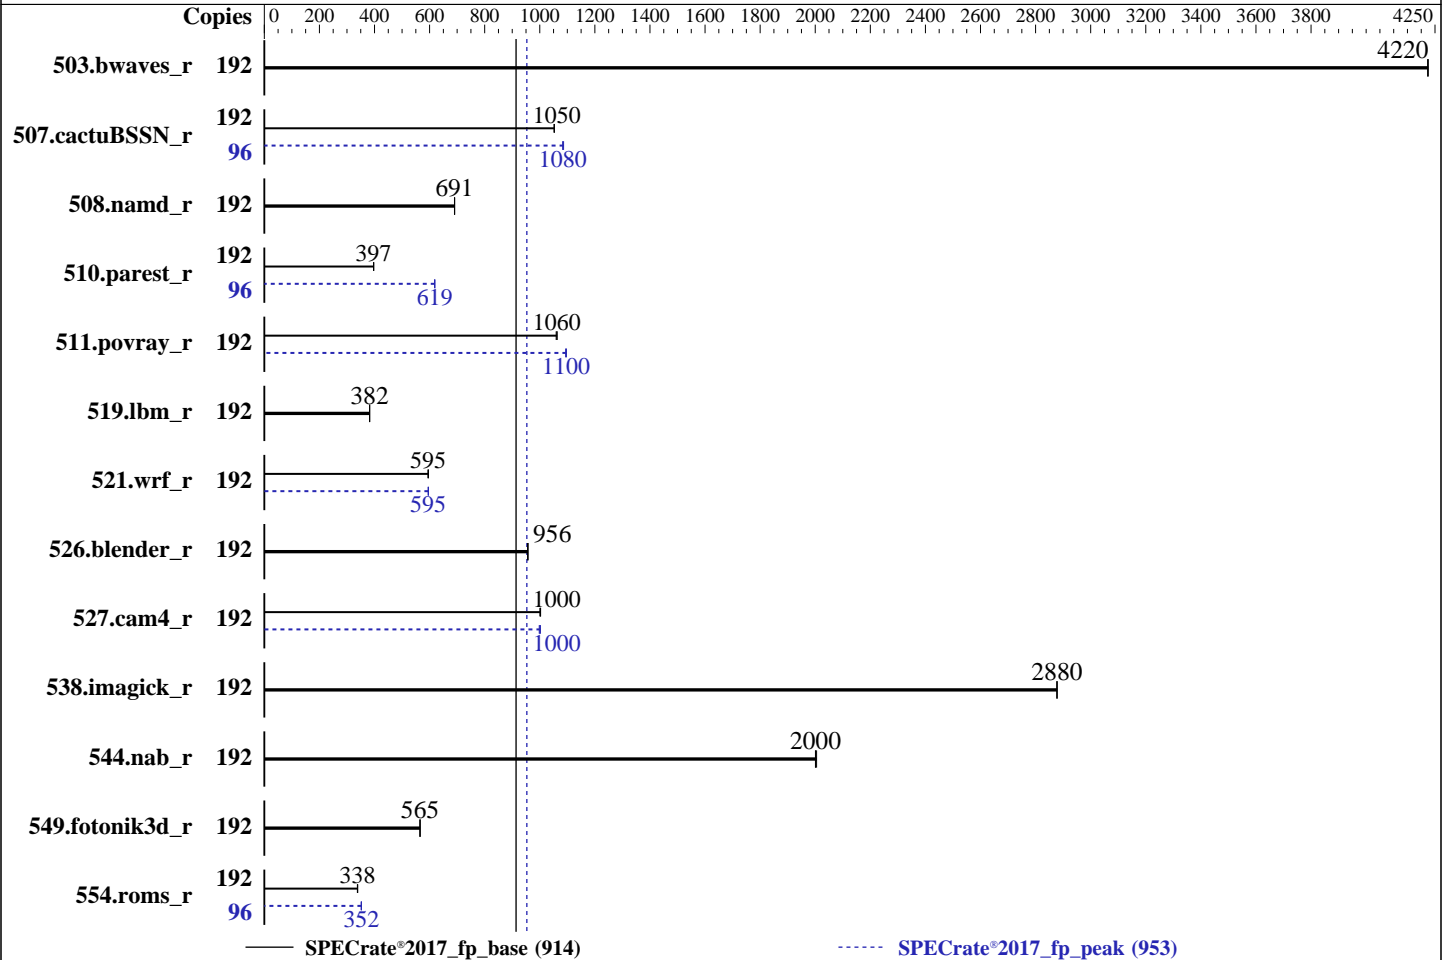

### Hardware

CPU Name: Intel Xeon Platinum 8468  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 4.3.1d released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	456	4220	<b>456</b>	<b>4220</b>	456	4230	192	456	4220	<b>456</b>	<b>4220</b>	456	4230
507.cactuBSSN_r	192	231	1050	<b>231</b>	<b>1050</b>	231	1050	96	<b>112</b>	<b>1080</b>	112	1080	112	1090
508.namd_r	192	264	691	<b>264</b>	<b>691</b>	264	690	192	264	691	<b>264</b>	<b>691</b>	264	690
510.parest_r	192	1267	397	<b>1266</b>	<b>397</b>	1264	397	96	<b>406</b>	<b>619</b>	406	618	406	619
511.povray_r	192	422	1060	<b>422</b>	<b>1060</b>	423	1060	192	410	1090	<b>409</b>	<b>1100</b>	409	1100
519.lbm_r	192	<b>529</b>	<b>382</b>	530	382	529	382	192	<b>529</b>	<b>382</b>	530	382	529	382
521.wrf_r	192	722	596	<b>723</b>	<b>595</b>	723	595	192	722	596	<b>722</b>	<b>595</b>	723	595
526.blender_r	192	305	957	<b>306</b>	<b>956</b>	306	956	192	305	957	<b>306</b>	<b>956</b>	306	956
527.cam4_r	192	<b>335</b>	<b>1000</b>	336	1000	335	1000	192	335	1000	336	998	<b>336</b>	<b>1000</b>
538.imagick_r	192	166	2880	166	2880	<b>166</b>	<b>2880</b>	192	166	2880	166	2880	<b>166</b>	<b>2880</b>
544.nab_r	192	<b>161</b>	<b>2000</b>	162	2000	161	2000	192	<b>161</b>	<b>2000</b>	162	2000	161	2000
549.fotonik3d_r	192	1323	566	1324	565	<b>1323</b>	<b>565</b>	192	1323	566	1324	565	<b>1323</b>	<b>565</b>
554.roms_r	192	903	338	899	339	<b>902</b>	<b>338</b>	96	433	352	<b>433</b>	<b>352</b>	434	352

SPECrate®2017\_fp\_base = **914**

SPECrate®2017\_fp\_peak = **953**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

cpupower frequency-set -g performance

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled

DCU streamer Prefetch set to Enabled

Enhanced CPU Performance set to Auto

LLC Dead Line set to Disabled

ADDDC Sparing set to Disabled

Processor C6 Report set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on srv04 Thu Sep 21 18:45:43 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux srv04 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86\_64  
x86\_64 x86\_64 GNU/Linux

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

2. w
   18:45:43 up 5 min,  1 user,  load average: 0.07, 1.14, 0.77
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -                18:45   7.00s  1.56s  0.27s  -bash

```

```

3. Username
   From environment variable $USER:  root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4126743
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4126743
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --action=build --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=96 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=96 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.293/templogs/preenv.fprate.293.0.log --lognum 293.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

physical id 0: core ids 0-47  
physical id 1: core ids 0-47  
physical id 0: apicids 0-95  
physical id 1: apicids 128-223

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8468
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              2
Stepping:               8
CPU max MHz:            3800.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-11,96-107
NUMA node1 CPU(s):    12-23,108-119
NUMA node2 CPU(s):    24-35,120-131
NUMA node3 CPU(s):    36-47,132-143
NUMA node4 CPU(s):    48-59,144-155
NUMA node5 CPU(s):    60-71,156-167
NUMA node6 CPU(s):    72-83,168-179
NUMA node7 CPU(s):    84-95,180-191

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Itlb multihit: Not affected  
 Vulnerability L1tf: Not affected  
 Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 128666 MB
node 0 free: 127591 MB
node 1 cpus: 12-23,108-119
node 1 size: 129017 MB
node 1 free: 128445 MB
node 2 cpus: 24-35,120-131
node 2 size: 129017 MB
node 2 free: 128487 MB
node 3 cpus: 36-47,132-143
node 3 size: 129017 MB
node 3 free: 128386 MB
node 4 cpus: 48-59,144-155
node 4 size: 129017 MB
node 4 free: 128198 MB
node 5 cpus: 60-71,156-167
node 5 size: 129017 MB
node 5 free: 128435 MB
node 6 cpus: 72-83,168-179
node 6 size: 129017 MB
node 6 free: 128476 MB
node 7 cpus: 84-95,180-191
node 7 size: 128936 MB
node 7 free: 128370 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1056471024 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

10. who -r  
run-level 3 Sep 21 18:40

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=82136e43-7b14-445e-80c8-a54855d5e2c7  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.80 GHz.  
The governor "powersave" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
vm.swappiness          1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode   0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   436G  14G  423G  4% /
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:         Cisco Systems Inc
Product:        UCSC-C240-M7SX
Serial:         WZP26360KC7
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    Cisco Systems, Inc.
BIOS Version:   C240M7.4.3.1d.0.0503232353
BIOS Date:     05/03/2023
BIOS Revision: 5.29
```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
 -ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids

-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8468, 2.10GHz)

SPECrate®2017\_fp\_base = 914

SPECrate®2017\_fp\_peak = 953

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-21 21:45:42-0400.

Report generated on 2023-11-21 20:30:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.