



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

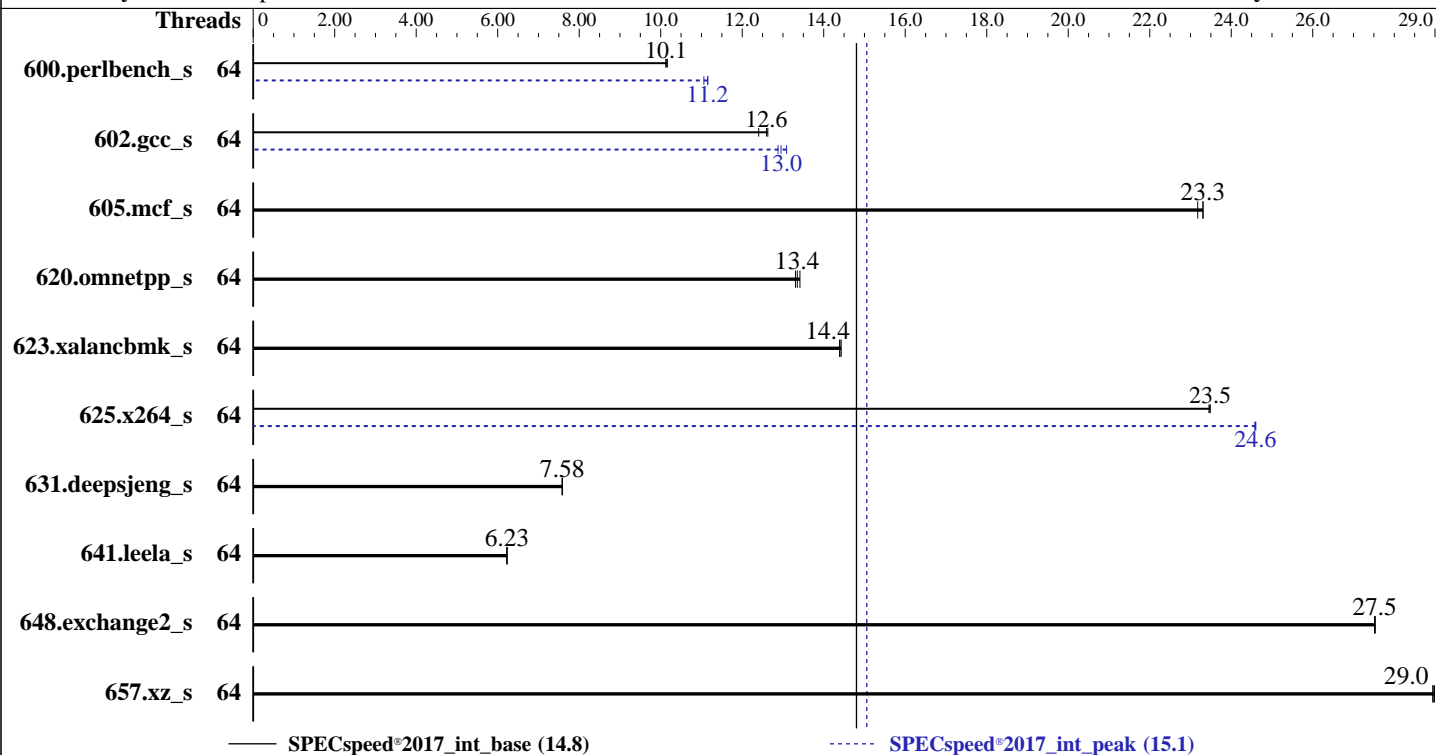

Hardware

CPU Name: Intel Xeon Gold 6558Q
 Max MHz: 4100
 Nominal: 3200
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R , running at 5200)
 Storage: 1 x 960 GB NVMe SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran
 Compiler for Linux;
 Parallel: Yes
 Firmware: Version 2.0 released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	175	10.1	175	10.2	<u>175</u>	<u>10.1</u>	64	<u>159</u>	<u>11.2</u>	159	11.2	160	11.1
602.gcc_s	64	<u>316</u>	<u>12.6</u>	321	12.4	315	12.6	64	304	13.1	<u>307</u>	<u>13.0</u>	309	12.9
605.mcf_s	64	204	23.2	203	23.3	<u>203</u>	<u>23.3</u>	64	204	23.2	203	23.3	<u>203</u>	<u>23.3</u>
620.omnetpp_s	64	123	13.3	122	13.4	<u>122</u>	<u>13.4</u>	64	123	13.3	122	13.4	<u>122</u>	<u>13.4</u>
623.xalancbmk_s	64	<u>98.4</u>	<u>14.4</u>	98.5	14.4	98.2	14.4	64	<u>98.4</u>	<u>14.4</u>	98.5	14.4	98.2	14.4
625.x264_s	64	75.2	23.5	<u>75.1</u>	<u>23.5</u>	75.1	23.5	64	71.8	24.6	<u>71.7</u>	<u>24.6</u>	71.7	24.6
631.deepsjeng_s	64	<u>189</u>	<u>7.58</u>	189	7.58	189	7.58	64	<u>189</u>	<u>7.58</u>	189	7.58	189	7.58
641.leela_s	64	274	6.23	274	6.23	<u>274</u>	<u>6.23</u>	64	274	6.23	274	6.23	<u>274</u>	<u>6.23</u>
648.exchange2_s	64	107	27.5	107	27.5	<u>107</u>	<u>27.5</u>	64	107	27.5	107	27.5	<u>107</u>	<u>27.5</u>
657.xz_s	64	213	29.0	214	28.9	<u>214</u>	<u>29.0</u>	64	213	29.0	214	28.9	<u>214</u>	<u>29.0</u>

SPECspeed®2017_int_base = **14.8**

SPECspeed®2017_int_peak = **15.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017_1123/lib/intel64:/home/cpu2017_1123/lib/ia32:/home/cpu2017_1123/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes

BIOS Settings:

Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
Hyper-Threading [ALL] = Disable
Enable Smart Power = OFF
Fan Mode: Full Speed
Using upgraded fans at 16.8K RPM
Using EVAC heat sinks

Sysinfo program /home/cpu2017_1123/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 195-51 Sat Nov 25 17:42:05 2023

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux 195-51 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043) x86_64
x86_64 x86_64 GNU/Linux

2. w
17:42:05 up 2 min, 3 users, load average: 0.16, 0.07, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 17:41 5.00s 0.86s 0.01s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2060620
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size        (kbytes, -s) unlimited
cpu time          (seconds, -t) unlimited
max user processes (-u) 2060620
virtual memory    (kbytes, -v) unlimited
file locks        (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=64 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=64 --tune base,peak --output_format all
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.005/templogs/preenv.intspeed.005.0.log
  --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_1123

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6558Q
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x210001f0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) GOLD 6558Q
CPU family:            6
Model:                 207
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           3201.0000
CPU min MHz:           800.0000
BogoMIPS:              6400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

L1i	32K	2M	8 Instruction	1	64	1	64
L2	2M	128M	16 Unified	2	2048	1	64
L3	60M	120M	15 Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 257607 MB
node 0 free: 256368 MB
node 1 cpus: 32-63
node 1 size: 257577 MB
node 1 free: 256582 MB
node distances:
node  0  1
  0: 10  21
  1: 21  10

```

9. /proc/meminfo

MemTotal: 527549340 kB

10. who -r

run-level 3 Nov 25 17:41 last=5

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target  Status
graphical      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early
                klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog
                smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
                exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                nvme-autoconnect ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                update-system-flatpaks upower vncserver@
indirect       wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=e127aef5-c5f0-41da-9548-1b52c1169a39
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=407M,high
crashkernel=72M,low

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.20 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017_1123
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   717G  104G  613G  15% /home
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Micron Technology MTC20F2085S1RC56BD1 32 GB 2 rank 5600, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.0
BIOS Date: 11/17/2023
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Gold 6558Q)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-25 20:42:04-0500.
Report generated on 2024-01-02 09:58:58 by CPU2017 PDF formatter v6716.
Originally published on 2024-01-01.