



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

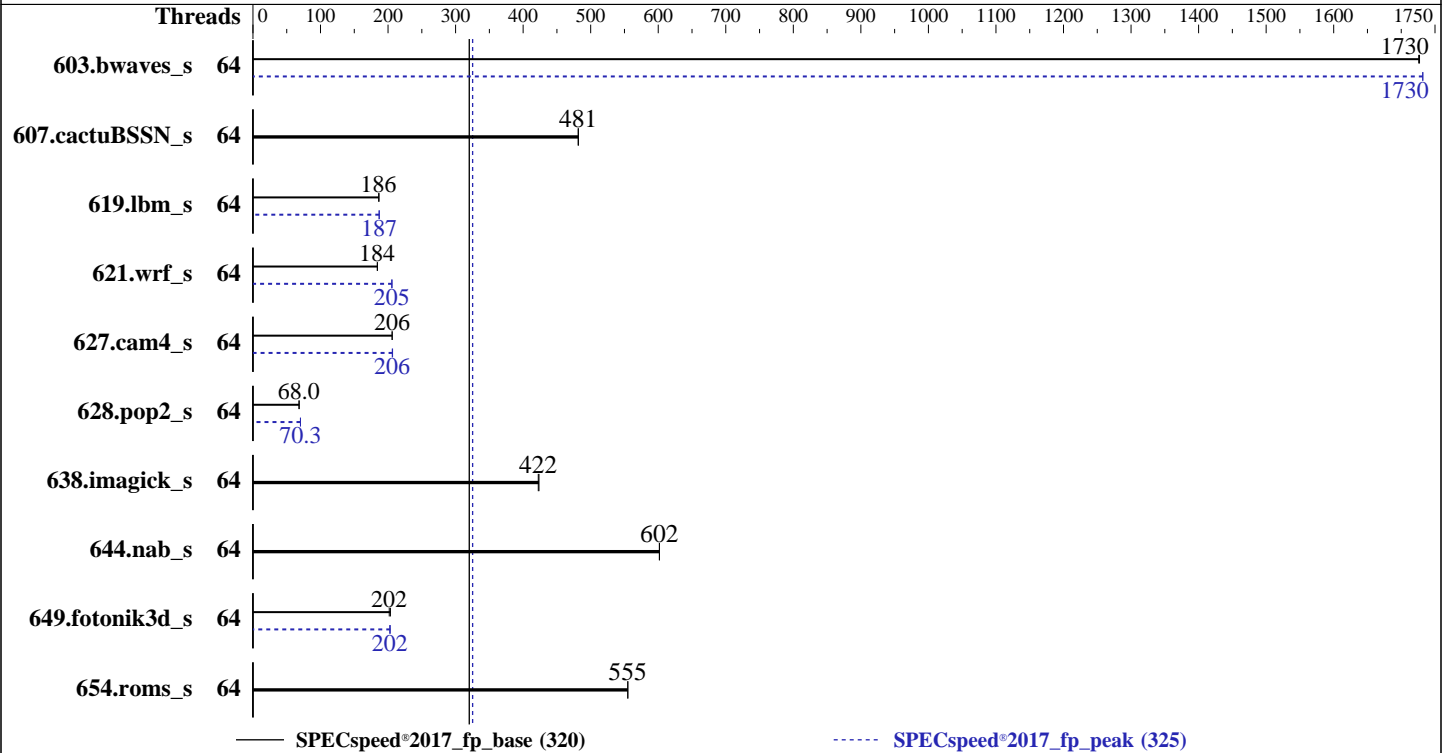

### Hardware

CPU Name: AMD EPYC 9354  
 Max MHz: 3800  
 Nominal: 3250  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 60 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.3 LTS  
 5.15.0-86-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.4.6 released Jul-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2023  
Hardware Availability: Feb-2023  
Software Availability: Oct-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<b><u>34.2</u></b>	<b><u>1730</u></b>	34.2	1730			64	<b><u>34.1</u></b>	<b><u>1730</u></b>	34.1	1730		
607.cactuBSSN_s	64	34.6	482	<b><u>34.6</u></b>	<b><u>481</u></b>			64	34.6	482	<b><u>34.6</u></b>	<b><u>481</u></b>		
619.lbm_s	64	28.1	187	<b><u>28.2</u></b>	<b><u>186</u></b>			64	28.0	187	<b><u>28.1</u></b>	<b><u>187</u></b>		
621.wrf_s	64	<b><u>71.9</u></b>	<b><u>184</u></b>	71.8	184			64	<b><u>64.4</u></b>	<b><u>205</u></b>	64.2	206		
627.cam4_s	64	<b><u>43.0</u></b>	<b><u>206</u></b>	43.0	206			64	42.9	207	<b><u>43.0</u></b>	<b><u>206</u></b>		
628.pop2_s	64	173	68.5	<b><u>175</u></b>	<b><u>68.0</u></b>			64	169	70.4	<b><u>169</u></b>	<b><u>70.3</u></b>		
638.imagick_s	64	34.1	423	<b><u>34.2</u></b>	<b><u>422</u></b>			64	34.1	423	<b><u>34.2</u></b>	<b><u>422</u></b>		
644.nab_s	64	<b><u>29.0</u></b>	<b><u>602</u></b>	29.0	602			64	<b><u>29.0</u></b>	<b><u>602</u></b>	29.0	602		
649.fotonik3d_s	64	44.8	204	<b><u>45.2</u></b>	<b><u>202</u></b>			64	44.8	203	<b><u>45.0</u></b>	<b><u>202</u></b>		
654.roms_s	64	28.4	555	<b><u>28.4</u></b>	<b><u>555</u></b>			64	28.4	555	<b><u>28.4</u></b>	<b><u>555</u></b>		

SPECspeed®2017\_fp\_base = **320**

SPECspeed®2017\_fp\_peak = **325**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECSpeed®2017\_fp\_peak = 325

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Oct-2023

## Operating System Notes (Continued)

To disable THP for peak runs of 621.wrf\_s:  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"  
PGHPF\_ZMEM = "yes"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Platform Notes

### BIOS settings:

DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled  
Virtualization Technology : Disabled  
NUMA Nodes per Socket : 1

System Profile : Custom  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled  
Determinism Slider : Power Determinism  
Algorithm Performance  
Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-spa Sat Oct 7 16:43:18 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a  
Linux amd-spa 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECSpeed®2017\_fp\_peak = 325

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Oct-2023

### Platform Notes (Continued)

```
16:43:18 up 2:16, 1 user, load average: 5.37, 4.92, 2.94
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU   WHAT
root      tty1    -             14:26      2:16m  2.24s  0.45s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

3. Username  
From environment variable \$USER: root

4. ulimit -a

time(seconds)	unlimited
file(blocks)	unlimited
data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	3093864
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8
--output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8 --output_format html,pdf,txt
fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8 --output_format html,pdf,txt
--nopower --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
speperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9354 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa10113e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 32
siblings        : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0:  core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Oct-2023

### Platform Notes (Continued)

physical id 1: core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115  
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115  
physical id 1: apicids 128-131,144-147,160-163,176-179,192-195,208-211,224-227,240-243  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9354 32-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3799.0720
CPU min MHz:            1500.0000
BogoMIPS:               6502.17
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                        cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                        fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                        v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                        rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             2 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              64 MiB (64 instances)
L3 cache:              512 MiB (16 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECSpeed®2017\_fp\_peak = 325

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Oct-2023

### Platform Notes (Continued)

Vulnerability Spec rstack overflow: Mitigation; safe RET  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP disabled, RSB filling, PBRSE-eIBRS Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-31  
node 0 size: 386542 MB  
node 0 free: 381997 MB  
node 1 cpus: 32-63  
node 1 size: 387036 MB  
node 1 free: 385871 MB  
node distances:  
node 0 1  
0: 10 32  
1: 32 10

9. /proc/meminfo

MemTotal: 792144940 kB

10. who -r

run-level 5 Oct 7 14:26

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

Default Target Status  
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION  
\* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd

13. Services, from systemctl list-unit-files

STATE UNIT FILES  
enabled ModemManager apparmor blk-availability console-setup cron dmesg e2scrub\_reap finalrd  
getty@ grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor  
lxd-agent multipathd pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd  
systemd-pstore systemd-resolved systemd-timesyncd thermald tuned udisks2  
enabled-runtime systemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync upower  
generated apport

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

## Platform Notes (Continued)

```

indirect      uuid
masked       cryptdisks cryptdisks-early gpu-manager hwclock lvm2 multipath-tools-boot
              networkd-dispatcher open-vm-tools rc rcS screen-cleanup sudo systemd-networkd-wait-online
              ua-reboot-cmds ubuntu-advantage ufw vgauth vmttoolsd x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-86-generic
root=/dev/mapper/ubuntuv-g-ubuntu--lv
ro

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 3
  Pstate-P0: 3250MHz

```

```

-----
16. tuned-adm active
  Current active profile: latency-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Oct-2023

### Platform Notes (Continued)

```

defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

```

```

-----
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 60G   3.4G   57G   6% /mnt/ramdisk

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge R7625
Product Family: PowerEdge
Serial:         1234567

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x 802C0000802C MTC20F2085S1RC48BA1 32 GB 2 rank 4800

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:     Dell Inc.
BIOS Version:    1.4.6
BIOS Date:       07/06/2023
BIOS Revision:   1.4

```

### Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2023  
Hardware Availability: Feb-2023  
Software Availability: Oct-2023

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

```

### Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

```

### Benchmarks using both Fortran and C:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

```

### Benchmarks using Fortran, C, and C++:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 320

PowerEdge R7625 (AMD EPYC 9354 32-Core Processor)

SPECspeed®2017\_fp\_peak = 325

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-07 12:43:18-0400.

Report generated on 2024-01-03 17:38:54 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.