



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

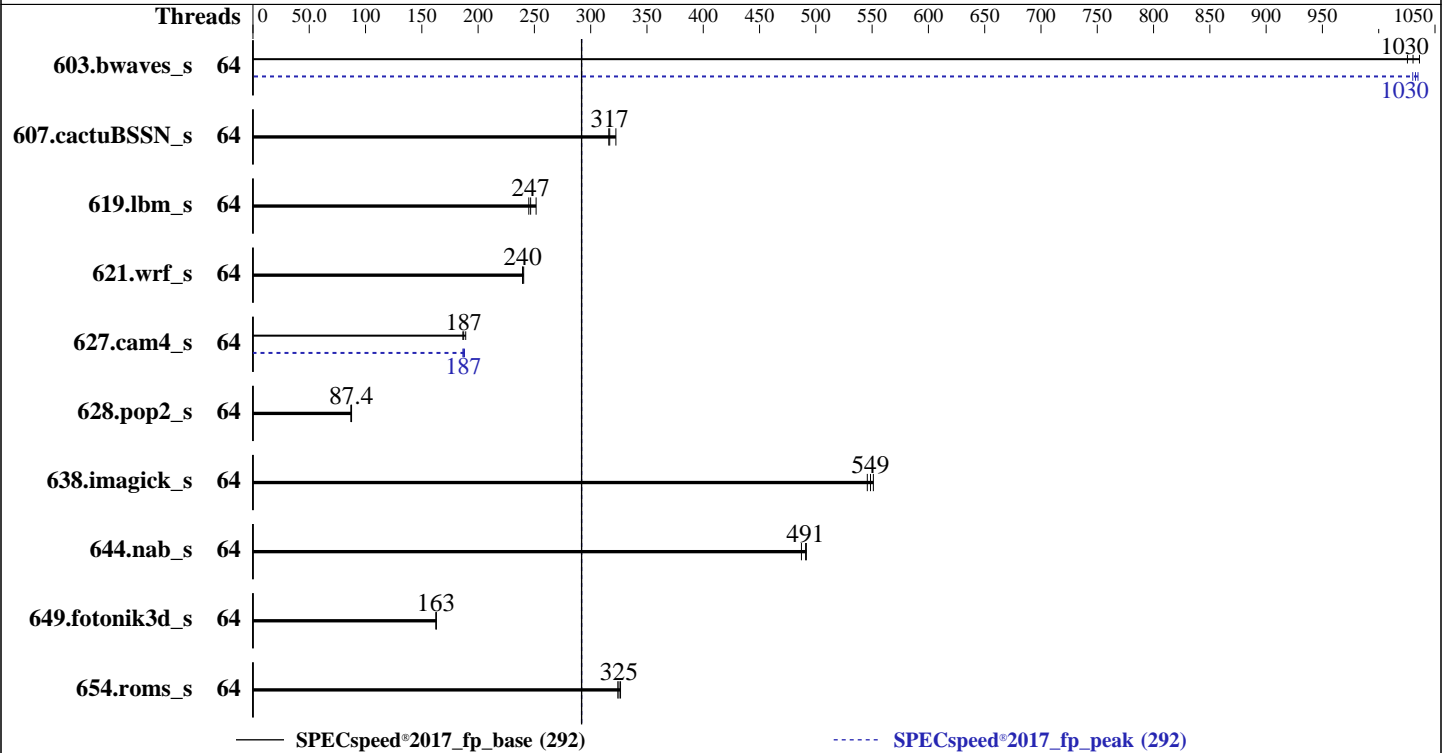

Hardware

CPU Name: Intel Xeon Gold 6544Y
 Max MHz: 4100
 Nominal: 3600
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v2.10 11/28/2023 released Nov-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECSpeed®2017_fp_base = 292

SPECSpeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	57.5	1030	56.9	1040	<u>57.3</u>	<u>1030</u>	64	<u>57.1</u>	<u>1030</u>	57.0	1030	57.3	1030
607.cactuBSSN_s	64	52.7	316	<u>52.6</u>	<u>317</u>	51.7	322	64	52.7	316	<u>52.6</u>	<u>317</u>	51.7	322
619.lbm_s	64	<u>21.2</u>	<u>247</u>	21.4	245	20.8	252	64	<u>21.2</u>	<u>247</u>	21.4	245	20.8	252
621.wrf_s	64	<u>55.2</u>	<u>240</u>	55.0	240	55.2	240	64	<u>55.2</u>	<u>240</u>	55.0	240	55.2	240
627.cam4_s	64	47.5	186	46.9	189	<u>47.3</u>	<u>187</u>	64	<u>47.4</u>	<u>187</u>	47.2	188	47.5	187
628.pop2_s	64	136	87.6	136	87.0	<u>136</u>	<u>87.4</u>	64	136	87.6	136	87.0	<u>136</u>	<u>87.4</u>
638.imagick_s	64	26.4	546	<u>26.3</u>	<u>549</u>	26.2	551	64	26.4	546	<u>26.3</u>	<u>549</u>	26.2	551
644.nab_s	64	35.9	487	35.5	492	<u>35.6</u>	<u>491</u>	64	35.9	487	35.5	492	<u>35.6</u>	<u>491</u>
649.fotonik3d_s	64	<u>56.0</u>	<u>163</u>	56.0	163	56.0	163	64	<u>56.0</u>	<u>163</u>	56.0	163	56.0	163
654.roms_s	64	<u>48.4</u>	<u>325</u>	48.6	324	48.2	327	64	<u>48.4</u>	<u>325</u>	48.6	324	48.2	327

SPECSpeed®2017_fp_base = **292**

SPECSpeed®2017_fp_peak = **292**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Latency-Performance using "tuned-adm profile latency-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECSpeed®2017_fp_base = 292

SPECSpeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Gold 6544Y processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Dead Block Predictor set to Enabled
Last Level Cache (LLC) Prefetch set to Enabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Workload Profile set to Custom
Intel DMI Link Frequency set to Gen2 Speed
Adjacent Sector Prefetch set to Disabled
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jan 5 00:02:10 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

2. w
00:02:10 up 0 min, 0 users, load average: 1.01, 0.37, 0.13
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062777
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062777
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/fpspeed_newavx512.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=64 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) GOLD 6544Y
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 16
siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6544Y
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 2
BogoMIPS: 7200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmx flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

Virtualization: VT-x

```
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 90 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
sequence
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257733 MB
node 0 free: 256911 MB
node 1 cpus: 16-31,48-63
node 1 size: 257984 MB
node 1 free: 257319 MB
node distances:
node  0  1
 0:  10  20
 1:  20  10

```

9. /proc/meminfo

MemTotal: 528095484 kB

10. who -r

run-level 3 Jan 5 00:01

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load
lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=cc6cc077-0be5-45b2-9254-52358283bcfe
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

14. cpupower frequency-info

```
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

```
Current active profile: latency-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

20. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

/dev/sda2 btrfs 371G 171G 199G 47% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL360 Gen11
Product Family: ProLiant
Serial: CNX2070DC4

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
 16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 2.10
BIOS Date: 11/28/2023
BIOS Revision: 2.10
Firmware Revision: 1.50

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-04 13:32:10-0500.
Report generated on 2024-01-30 23:25:24 by CPU2017 PDF formatter v6716.
Originally published on 2024-01-30.