



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Mar-2024

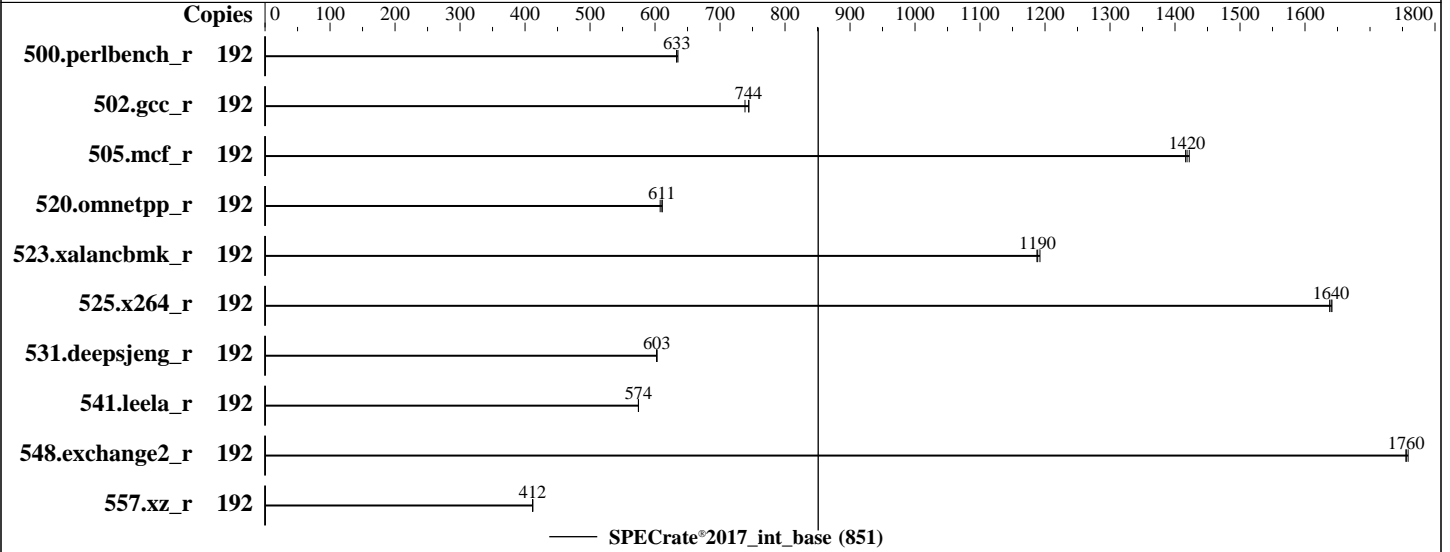

Hardware

CPU Name: Intel Xeon Gold 6418H
 Max MHz: 4000
 Nominal: 2100
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version RSE109I 3.11 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	483	633	481	635	483	633							
502.gcc_r	192	365	744	368	738	365	744							
505.mcf_r	192	218	1420	219	1420	219	1420							
520.omnetpp_r	192	414	608	412	611	413	611							
523.xalancbmk_r	192	170	1190	171	1190	171	1190							
525.x264_r	192	205	1640	205	1640	205	1640							
531.deepsjeng_r	192	365	602	365	603	365	603							
541.leela_r	192	553	575	554	574	553	574							
548.exchange2_r	192	286	1760	287	1760	286	1760							
557.xz_r	192	504	412	504	412	504	412							

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/lib/ia32:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Mar-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
SNC set to SNC2
UPI Link Disable set to Minimum Number of Links Enabled
LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Apr 24 12:06:45 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
12:06:45 up 1 min, 1 user, load average: 4.95, 2.95, 1.14
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 12:06 12.00s 0.86s 0.01s /bin/bash ./rate_int.sh

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 8255570
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 8255570
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate_int.sh
/bin/bash ./rate_int.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.020/templogs/preenv.intrate.020.0.log --lognum 020.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0004d0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 24
siblings      : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 2: core ids 0-23
physical id 3: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
physical id 2: apicids 256-303
physical id 3: apicids 384-431
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 851

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6418H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              4
Stepping:               8
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              4.5 MiB (96 instances)
L1i cache:              3 MiB (96 instances)
L2 cache:               192 MiB (96 instances)
L3 cache:               240 MiB (4 instances)
NUMA node(s):          8
NUMA node0 CPU(s):     0-11,96-107
NUMA node1 CPU(s):     12-23,108-119
NUMA node2 CPU(s):     24-35,120-131
NUMA node3 CPU(s):     36-47,132-143
NUMA node4 CPU(s):     48-59,144-155
NUMA node5 CPU(s):     60-71,156-167
NUMA node6 CPU(s):     72-83,168-179
NUMA node7 CPU(s):     84-95,180-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Mar-2024

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 257705 MB
node 0 free: 256263 MB
node 1 cpus: 12-23,108-119
node 1 size: 258041 MB
node 1 free: 257095 MB
node 2 cpus: 24-35,120-131
node 2 size: 258007 MB
node 2 free: 257689 MB
node 3 cpus: 36-47,132-143
node 3 size: 258041 MB
node 3 free: 257820 MB
node 4 cpus: 48-59,144-155
node 4 size: 258041 MB
node 4 free: 257801 MB
node 5 cpus: 60-71,156-167
node 5 size: 258041 MB
node 5 free: 257863 MB
node 6 cpus: 72-83,168-179
node 6 size: 258041 MB
node 6 free: 257766 MB
node 7 cpus: 84-95,180-191
node 7 size: 257994 MB
node 7 free: 257704 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 21 21 31 31 21 21
1:  12 10 21 21 31 31 21 21
2:  21 21 10 12 21 21 31 31
3:  21 21 12 10 21 21 31 31
4:  31 31 21 21 10 12 21 21
5:  31 31 21 21 12 10 21 21
6:  21 21 31 31 21 21 10 12
7:  21 21 31 31 21 21 12 10

```

9. /proc/meminfo

MemTotal: 2113450368 kB

10. who -r

run-level 3 Apr 24 12:06

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 851

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm
grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap nvme-fc-autoconnect rdisc rpcbind rpmconfigcheck
rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd

generated ntp_sync
indirect wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=39b62cad-8791-4e9f-8882-c2af12880769
splash=silent
mitigations=auto
quiet
security=apparmor
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 851

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Mar-2024

Platform Notes (Continued)

enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 894G 155G 739G 18% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial: None

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
4x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
2x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
11x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
3x Samsung M321R8GA0BB0-CQKVE 64 GB 2 rank 4800
12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: RSE109I-3.11
BIOS Date: 01/05/2024
BIOS Revision: 3.11
Firmware Revision: 3.10

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 851

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 851

ThinkSystem SR850 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Mar-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-24 00:06:44-0400.

Report generated on 2024-05-21 19:27:09 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.